

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 3.0 rakskurna kuggar
Module 3.0 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

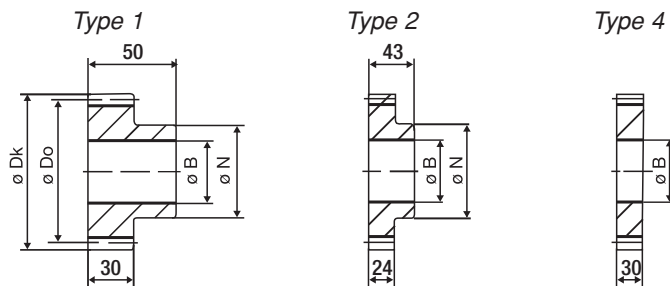

Antal tänder No of teeth					Best. Nr. Code	Md 1)	Best. Nr. Code	Md 1)	Best. Nr. Code	Md 1)
Z	B	N	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)
12	15	25	42	36	S-3012-30	8.1	S-3012-24	6.5	-	-
13	15	30	45	39	S-3013-30	9.8	S-3013-24	-	-	-
14	15	30	48	42	S-3014-30	11.5	S-3014-24	9.2	-	-
15	15	35	51	45	S-3015-30	14.7	S-3015-24	11.8	-	-
16	15	35	54	48	S-3016-30	17.0	S-3016-24	13.6	-	-
17	15	42	57	51	S-3017-30	19.2	-	-	-	-
18	15	45	60	54	S-3018-30	21.5	S-3018-24	17.2	-	-
19	15	45	63	57	S-3019-30	24.1	-	-	-	-
20	15	45	66	60	S-3020-30	26.7	S-3020-24	21.4	-	-
21	15	50	69	63	S-3021-30	29.6	S-3021-24	23.7	-	-
22	15	50	72	66	S-3022-30	32.5	-	-	-	-
23	15	55	75	69	S-3023-30	35.5	-	-	-	-
24	15	55	78	72	S-3024-30	38.4	S-3024-24	30.7	-	-
25	15	60	81	75	S-3025-30	41.3	S-3025-24	-	-	-
26	15	65	84	78	S-3026-30	44.8	-	-	-	-
27	15	65	87	81	S-3027-30	48.2	-	-	-	-
28	15	70	90	84	S-3028-30	51.7	S-3028-24	41.4	-	-
29	15	70	93	87	S-3029-30	55.1	-	-	-	-
30	20	75	96	90	S-3030-30	58.6	S-3030-24	46.9	-	-
31	20	80	99	93	S-3031-30	62.5	-	-	-	-
32	20	80	102	96	S-3032-30	66.5	S-3032-24	53.2	-	-
33	20	80	105	99	S-3033-30	70.4	-	-	-	-
34	20	85	108	102	S-3034-30	74.5	-	-	-	-
35	20	85	111	105	S-3035-30	78.3	-	-	-	-
36	20	90	114	108	S-3036-30	82.6	S-3036-24	66.1	-	-
37	20	90	117	111	S-3037-30	87.0	-	-	-	-
38	20	95	120	114	S-3038-30	91.8	-	-	-	-
39	20	100	123	117	S-3039-30	95.7	-	-	-	-
40	20	100	126	120	S-3040-30	100.0	S-3040-24	80.0	-	-
41	20	100	129	123	S-3041-30	-	-	-	-	-
42	20	100	132	126	S-3042-30	109.6	S-3042-24	87.7	-	-
43	20	100	135	129	S-3043-30	-	-	-	-	-
44	20	100	138	132	S-3044-30	-	-	-	-	-
45	20	100	141	135	S-3045-30	124.0	S-3045-24	99.2	-	-
46	20	100	144	138	S-3046-30	-	-	-	-	-
47	20	100	147	141	S-3047-30	-	-	-	-	-
48	20	100	150	144	S-3048-30	139.0	S-3048-24	111.0	-	-
49	25	110	153	147	S-3049-30	-	-	-	-	-
50	25	110	156	150	S-3050-30	149.0	S-3050-24	119.0	SP-3050-30	149.0
51	25	110	159	153	S-3051-30	-	-	-	-	-
52	25	110	162	156	S-3052-30	-	S-3052-24	-	SP-3052-30	-
53	25	110	165	159	S-3053-30	-	-	-	-	-
54	25	110	168	162	S-3054-30	171.0	S-3054-24	137.0	-	-
55	25	120	171	165	S-3055-30	-	-	-	-	-
56	25	120	174	168	S-3056-30	182.0	S-3056-24	146.0	-	-
57	25	120	177	171	S-3057-30	-	-	-	SP-3057-30	-
58	25	120	180	174	S-3058-30	-	-	-	-	-
60	25	120	186	180	S-3060-30	204.0	S-3060-24	165.0	SP-3060-30	204.0
64	25	120	198	192	S-3064-30	-	-	-	-	-
65	25	120	201	195	S-3065-30	-	-	-	-	-
67	25	120	207	201	S-3067-30	-	-	-	-	-
70	25	120	216	210	S-3070-30	263.7	-	-	-	-
72	25	120	222	216	S-3072-30	275.0	S-3072-24	220.0	-	-
75	25	120	231	225	S-3075-30	-	-	-	SP-3075-30	204.0
76	25	120	234	228	S-3076-30	-	-	-	-	-
80	25	120	246	240	S-3080-30	321.0	-	-	SP-3080-30	321.0
85	25	-	261	255	-	-	-	-	SP-3085-30	-
90	25	-	276	270	-	-	-	-	SP-3090-30	-
95	25	-	291	285	-	-	-	-	SP-3095-30	-
100	30	-	306	300	-	-	-	-	SP-30100-30	-
110	25	150	336	330	S-30110-30	-	-	-	SP-30110-30	-
114	30	-	348	342	-	-	-	-	SP-30114-30	-
120	25	-	366	360	-	-	-	-	SP-30120-30	-
127	25	-	387	381	-	-	-	-	SP-30127-30	-

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.

1) With safetyfaktor 1.4 for tooth root stress.

Reservation för måttförändringar / Reservation for dimensional changes

Mått i mm / Dimensions in mm