

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 4.0 rakskurna kuggar
Module 4.0 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

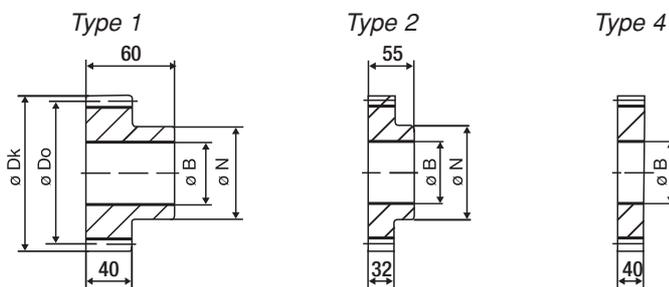

Antal tänder No of teeth		Best. Nr. Code			Md 1)	Best. Nr. Code		Md 1)	Best. Nr. Code		Md 1)
Z	B	N	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)	
12	20	35	56	48	S-4012-40	20.0	S-4012-32	16.0	-	-	
13	20	35	60	52	S-4013-40	23.2	-	-	-	-	
14	20	45	64	56	S-4014-40	26.5	S-4014-32	21.2	-	-	
15	20	45	68	60	S-4015-40	32.7	S-4015-32	27.4	-	-	
16	20	50	72	64	S-4016-40	37.7	S-4016-32	30.2	-	-	
17	20	50	76	68	S-4017-40	42.6	-	-	-	-	
18	20	55	80	72	S-4018-40	77.6	S-4018-32	38.1	-	-	
19	20	60	84	76	S-4019-40	53.1	-	-	-	-	
20	20	65	88	80	S-4020-40	58.6	S-4020-32	46.9	-	-	
21	20	70	92	84	S-4021-40	65.3	S-4021-32	52.2	-	-	
22	20	70	96	88	S-4022-40	72.0	S-4022-32	-	-	-	
23	20	75	100	92	S-4023-40	78.6	S-4023-32	-	-	-	
24	20	75	104	96	S-4024-40	85.3	S-4024-32	68.2	-	-	
25	20	75	108	100	S-4025-40	92.0	S-4025-32	73.6	-	-	
26	20	80	112	104	S-4026-40	99.8	-	-	-	-	
27	20	80	116	108	S-4027-40	108.0	-	-	-	-	
28	20	80	120	112	S-4028-40	115.0	S-4028-32	92.0	-	-	
29	20	80	124	116	S-4029-40	123.0	-	-	-	-	
30	20	80	128	120	S-4030-40	131.0	S-4030-32	105.0	-	-	
31	20	90	132	124	S-4031-40	-	-	-	-	-	
32	20	90	136	128	S-4032-40	148.0	-	118.0	-	-	
34	30	90	144	136	S-4034-40	-	S-4032-32	-	-	-	
35	30	90	148	140	S-4035-40	173.0	-	-	-	-	
36	30	90	152	144	S-4036-40	181.0	S-4036-32	145.0	-	-	
37	30	100	156	148	S-4037-40	-	-	-	-	-	
38	30	100	160	152	S-4038-40	-	-	-	-	-	
40	30	100	168	160	S-4040-40	215.0	S-4040-32	172.0	-	-	
42	30	100	176	168	S-4042-40	234.0	S-4042-32	187.0	-	-	
44	30	100	184	176	S-4044-40	-	-	-	-	-	
45	30	100	188	180	S-4045-40	262.0	S-4045-32	210.0	-	-	
46	30	110	192	184	S-4046-40	-	-	-	-	-	
47	30	110	196	188	S-4047-40	-	-	-	-	-	
48	30	110	200	192	S-4048-40	290.0	S-4048-32	232.0	SP-4048-40	290	
50	30	120	208	200	S-4050-40	309.0	S-4050-32	247.0	-	-	
52	30	120	216	208	S-4052-40	-	S-4052-32	-	SP-4052-40	-	
54	30	120	224	216	S-4054-40	352.0	S-4054-32	282.0	-	-	
55	30	120	228	220	S-4055-40	-	-	-	SP-4055-40	-	
56	30	130	232	224	S-4056-40	373.0	S-4056-32	298.0	-	-	
58	30	140	240	232	S-4058-40	-	-	-	-	-	
60	30	140	248	240	S-4060-40	416.0	S-4060-32	332.0	-	-	
64	40	140	264	256	S-4064-40	607.0	-	-	-	-	
65	40	140	268	260	S-4065-40	-	-	-	SP-4065-40	-	
67	40	140	276	268	S-4067-40	-	-	-	SP-4067-40	-	
70	30	140	288	280	S-4070-40	690.0	-	-	SP-4070-40	690	
72	40	140	296	288	S-4072-40	718.0	S-4072-32	574.0	SP-4072-40	718	
76	30	140	312	304	S-4076-40	-	-	-	SP-4076-40	-	
80	40	140	328	320	S-4080-40	916.0	-	-	SP-4080-40	916	
85	30	-	348	340	-	-	-	-	SP-4085-40	-	
90	30	-	368	360	-	-	-	-	SP-4090-40	-	
96	30	-	392	384	-	-	-	-	SP-4096-40	-	
100	30	-	408	400	-	-	-	-	SP-40100-40	-	
114	30	-	464	456	-	-	-	-	SP-40114-40	-	

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.

1) With safetyfaktor 1.4 för tooth root stress.