


TSUBAKI ANSI SUPER RULLKEDJOR

TSUBAKI ANSI SUPER DRIVE CHAINS

A

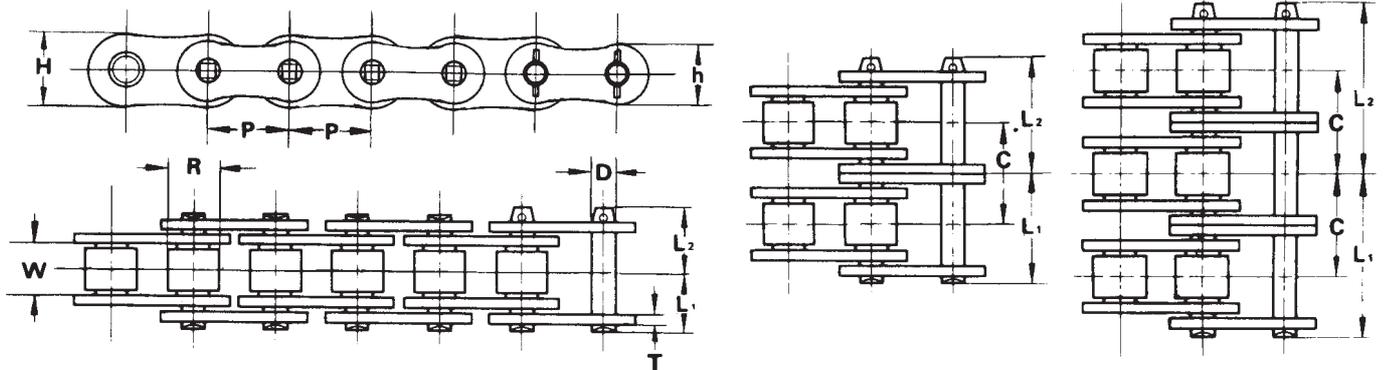

TSUBAKI Kedja Nr. Chain No.	Delning Pitch P	Rull diam. Roller dia. R	Invändig bredd Inner Width W	Sidbricka Link Plate			Bult Pin			Tvärdelning Transverse Pitch C	Genomsn. draghåll- fasthet Average tensile strength kN	Högsta tillåtna belastning Max allowable tension kN	Ca. vikt Approx Mass kg/m
				T	H	h	D	L ₁	L ₂				
SIMPLEX													
SUPER 80	25.40	15.88	15.88	3.2	24.1	20.8	7.94	16.25	19.25	–	84.3	18.6	2.81
SUPER 100	31.75	19.05	19.05	4.0	30.1	26.0	9.54	19.75	22.85	–	127.0	30.4	4.25
SUPER 120	38.10	22.23	25.40	4.8	36.2	31.2	11.11	24.90	28.90	–	186.0	39.2	6.30
SUPER 140	44.45	25.40	25.40	5.6	42.2	36.4	12.71	26.90	31.70	–	245.0	53.9	8.04
SUPER 160	50.80	28.58	31.75	6.4	48.2	41.6	14.29	31.85	36.85	–	314.0	70.6	10.79
SUPER 200	63.50	39.69	38.10	8.0	60.3	52.0	19.85	39.00	44.80	–	490.0	94.1	17.63
SUPER 240	76.20	47.63	47.63	9.5	72.4	62.4	23.81	47.90	55.50	–	726.0	132.0	25.63
DUPLEX													
SUPER 80-2	25.40	15.88	15.88	3.2	24.1	20.8	7.94	30.90	33.90	29.3	169.0	31.7	5.62
SUPER 100-2	31.75	19.05	19.05	4.0	30.1	26.0	9.54	37.70	40.80	35.8	255.0	51.7	8.38
SUPER 120-2	38.10	22.23	25.40	4.8	36.2	31.2	11.11	47.60	51.60	45.4	373.0	66.7	12.44
SUPER 140-2	44.45	25.40	25.40	5.6	42.2	36.4	12.71	51.35	56.15	48.9	490.0	91.7	15.92
SUPER 160-2	50.80	28.58	31.75	6.4	48.2	41.6	14.29	61.15	66.15	58.5	628.0	120.0	21.43
SUPER 200-2	63.50	39.69	38.10	8.0	60.3	52.0	19.85	74.85	80.65	71.6	981.0	160.0	34.91
SUPER 240-2	76.20	47.63	47.63	9.5	72.4	62.4	23.81	91.90	99.40	87,8	1450.0	225.0	50.88
TRIPLEX													
SUPER 80-3	25.40	15.88	15.88	3.2	24.1	20.8	7.94	45.60	48.50	29.3	253.0	46.6	8.40
SUPER 100-3	31.75	19.05	19.05	4.0	30.1	26.0	9.54	55.65	58.75	35.8	382.0	76.0	12.57
SUPER 120-3	38.10	22.23	25.40	4.8	36.2	31.2	11.11	70.40	74.40	45.4	559.0	98.1	18.64
SUPER 140-3	44.45	25.40	25.40	5.6	42.2	36.4	12.71	75.85	80.75	48.9	735.0	135.0	23.84
SUPER 160-3	50.80	28.58	31.75	6.4	48.2	41.6	14.29	90.45	95.45	58.5	941.0	177.0	32.10
SUPER 200-3	63.50	39.69	38.10	8.0	60.3	52.0	19.85	110.75	116.45	71.6	1470.0	235.0	52.44
SUPER 240-3	76.20	47.63	47.63	9.5	72.4	62.4	23.81	135.85	143.15	87,8	2180.0	331.0	76.11

Not: 1. Halvlänk tillverkas ej./ Offset links are not available

2. Lås med presspassning levereras som standard./ Press-fit type connecting Links will be supplied

3. Kedjan levereras nitad som standard./ Riveted type chain will be provided unless otherwise speifred