

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 5.0 rakskurna kuggar
Module 5.0 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

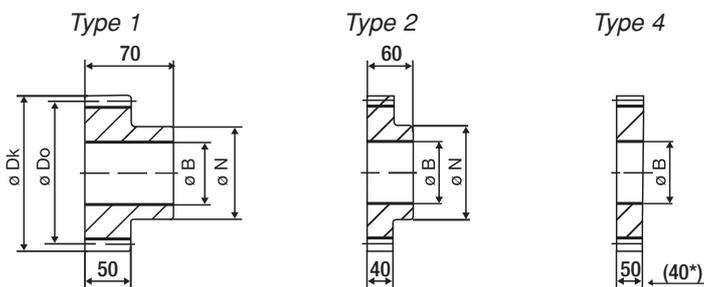

Antal tänder No of teeth		Best. Nr. Code			Md 1)	Best. Nr. Code		Md 1)	Best. Nr. Code		Md 1)
Z	B	N	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)	
12	20	45	70	60	S-5012-50	40.0	S-5012-40	32.0	-	-	
13	20	45	75	65	S-5013-50	49.0	S-5013-40	-	-	-	
14	20	60	80	70	S-5014-50	55.0	S-5014-40	46.4	-	-	
15	20	60	85	75	S-5015-50	66.4	S-5015-40	53.1	-	-	
16	20	65	90	80	S-5016-50	77.6	S-5016-40	62.1	-	-	
17	20	70	95	85	S-5017-50	88.8	-	-	-	-	
18	20	70	100	90	S-5018-50	100.0	S-5018-40	80.0	-	-	
19	20	70	105	95	S-5019-50	113.0	-	-	-	-	
20	25	75	110	100	S-5020-50	126.0	S-5020-40	101.0	-	-	
21	25	75	115	105	S-5021-50	141.0	-	-	-	-	
22	25	80	120	110	S-5022-50	156.0	-	-	-	-	
23	25	80	125	115	S-5023-50	171.0	S-5023-40	-	-	-	
24	25	80	130	120	S-5024-50	186.0	S-5024-40	149.0	-	-	
25	25	80	135	125	S-5025-50	201.0	S-5025-40	161.0	-	-	
26	25	90	140	130	S-5026-50	218.0	-	-	-	-	
27	25	90	145	135	S-5027-50	236.0	-	-	-	-	
28	25	90	150	140	S-5028-50	253.0	S-5028-40	202.0	-	-	
29	25	90	155	145	S-5029-50	271.0	-	-	-	-	
30	25	90	160	150	S-5030-50	288.0	S-5030-40	230.0	-	-	
32	30	100	170	160	S-5032-50	329.0	S-5032-40	263.0	-	-	
34	30	100	180	170	S-5034-50	-	-	-	-	-	
35	30	100	185	175	S-5035-50	390.0	-	-	-	-	
36	30	105	190	180	S-5036-50	410.0	S-5036-40	328.0	SP-5036-50	410	
38	30	105	200	190	S-5038-50	451.0	-	-	-	-	
40	30	110	210	200	S-5040-50	492.0	S-5040-40	394.0	SP-5040-50	492	
45	30	110	235	225	S-5045-50	624.0	S-5045-40	499.0	-	-	
48	30	120	250	240	S-5048-50	703.0	S-5048-40	562.0	-	-	
50	30	120	260	250	S-5050-50	756.0	S-5050-40	605.0	-	-	
52	30	130	270	260	S-5052-50	-	S-5052-40	-	SP-5052-40*	-	
54	30	130	280	270	S-5054-50	925.0	S-5054-40	700.0	-	-	
55	30	140	285	275	S-5055-50	-	-	-	-	-	
56	30	140	290	280	S-5056-50	-	S-5056-40	-	SP-5056-40*	-	
58	30	140	300	290	-	-	S-5058-40	-	-	-	
60	30	140	310	300	S-5060-50	1180.0	S-5060-40	944.0	SP-5060-50	1180	
64	40	150	330	320	S-5064-50	-	-	-	-	-	
70	40	150	360	350	S-5070-50	-	-	-	-	-	
80	40	150	410	400	S-5080-50	2250.0	-	-	SP-5080-50	2250	
90	40	150	460	450	S-5090-50	-	-	-	-	-	

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.

1) With safetyfaktor 1.4 för tooth root stress.

* Kommer att ändras till 50 mm.

* Will be changed to 50 mm.