

# CYLINDRISKA KUGGHJUL I STÅL


## STEEL SPURGEARS

**Modul 6.0** raxskurna kuggar  
**Module 6.0** straight toothed

Ingreppsvinkel 20°  
 Pressure angle 20°

Material: SS 1672  
 Material: SS 1672

Toleranser: B = H7  
 Tolerance: B = H7

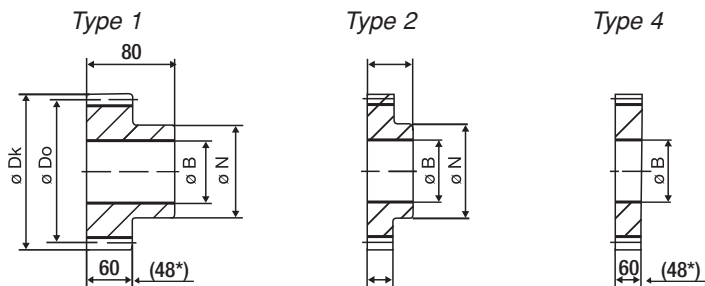

| Antal tänder<br>No of teeth |    |     |     |     | Best. Nr.<br>Code | Md 1)  | Best. Nr.<br>Code | Md 1) | Best. Nr.<br>Code | Md 1)  |
|-----------------------------|----|-----|-----|-----|-------------------|--------|-------------------|-------|-------------------|--------|
| Z                           | B  | N   | Dk  | Do  | Type 1            | (Nm)   | Type 2            | (Nm)  | Type 4            | (Nm)   |
| 10                          | 20 | 40  | 72  | 60  | S-6010-60         |        |                   |       |                   |        |
| 12                          | 20 | 50  | 84  | 72  | S-6012-60         | 73.0   | -                 | -     | -                 | -      |
| 13                          | 20 | 60  | 90  | 78  | S-6013-60         | -      | -                 | -     | -                 | -      |
| 14                          | 25 | 65  | 96  | 84  | S-6014-60         |        |                   |       |                   |        |
| 15                          | 40 | 70  | 102 | 90  | S-6015-60         | 119.0  | -                 | -     | -                 | -      |
| 16                          | 40 | 75  | 108 | 96  | S-6016-60         | 137.0  | -                 | -     | -                 | -      |
| 17                          | 30 | 80  | 114 | 102 | S-6017-60         | -      | -                 | -     | -                 | -      |
| 18                          | 45 | 85  | 120 | 108 | S-6018-60         | 173.0  | -                 | -     | -                 | -      |
| 20                          | 45 | 100 | 132 | 120 | S-6020-60         | 212.0  | -                 | -     | -                 | -      |
| 21                          | 45 | 110 | 138 | 126 | S-6021-60         | -      | -                 | -     | -                 | -      |
| 24                          | 45 | 100 | 156 | 144 | S-6024-60 *       | 309.0  | -                 | -     | -                 | -      |
| 25                          | 30 | 100 | 162 | 150 | S-6025-60         | 333.0  | -                 | -     | -                 | -      |
| 27                          | 30 | 100 | 174 | 162 | S-6027-60         | -      | -                 | -     | -                 | -      |
| 28                          | 30 | 100 | 180 | 168 | S-6028-60         |        |                   |       |                   |        |
| 30                          | 50 | 100 | 192 | 180 | S-6030-60         | 456.0  | -                 | -     | -                 | -      |
| 32                          | 50 | 100 | 204 | 192 | S-6032-60         | -      | -                 | -     | -                 | -      |
| 35                          | 55 | 130 | 222 | 210 | S-6035-60         | -      | -                 | -     | -                 | -      |
| 36                          | 50 | 130 | 228 | 216 | S-6036-60         | 650.0  | -                 | -     | -                 | -      |
| 40                          | 55 | 130 | 252 | 240 | S-6040-60         | 781.0  | -                 | -     | -                 | -      |
| 45                          | 55 | 130 | 282 | 270 | S-6045-60         | 1045.0 | -                 | -     | -                 | -      |
| 48                          | 40 | -   | 300 | 288 | -                 | -      | -                 | -     | SP-6048-60        | 1202.0 |
| 50                          | 40 | 200 | 312 | 300 | S-6050-60         | -      | -                 | -     | SP-6050-60        | 1308.0 |
| 52                          | 40 | -   | 324 | 312 | -                 | -      | -                 | -     | SP-6052-60        | -      |
| 55                          | 50 | -   | 342 | 330 | -                 | -      | -                 | -     | SP-6055-60        | -      |
| 56                          | 50 | -   | 348 | 336 | -                 | -      | -                 | -     | SP-6056-60 *      | -      |
| 60                          | 50 | 250 | 372 | 360 | S-6060-60         | -      | -                 | -     | SP-6060-60        | -      |
| 64                          | 50 | 250 | 396 | 384 | S-6064-60         |        |                   |       |                   |        |

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.

1) With safetyfactor 1.4 for tooth root stress.

\* Gammalt lager med kuggbredd 48mm finns.

\* Old stock with 48 mm tooth wide available.