



# TSUBAKI ANSI TRANSPORTÖRKEDJA DUBBEL DELNING

## TSUBAKI ANSI DOUBLE PITCH CONVEYOR CHAINS

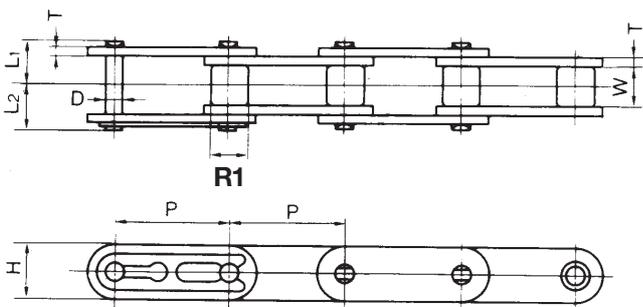

**S-Rulle/ S-Roller**

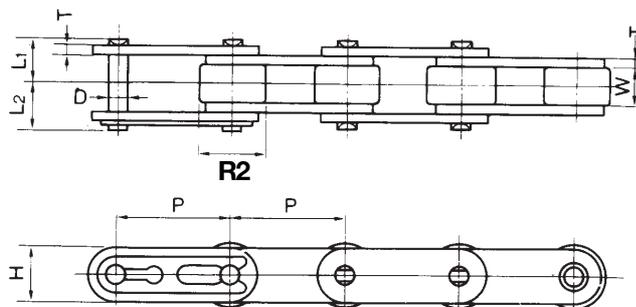

**R-Rulle/ R-Roller**

TSUBAKI Kedja Nr. Chain No.	Rull typ Roller type	Delning Pitch P	Inv. bredd Inner width W	Rull diam. Roller dia.		Bult Pin			Sidobricka Link plate		Genomsn. draghåll- fasthet Average tensile strength kN	Högsta tillåtna belast- ning Max allowable tension kN	Ca. vikt kg/m Approx Mass	
				R1	R2	L1	L2	D	Höjd Height H	Tjocklek Thickness T			S rulle S-Roller	R rulle R-Roller
				<b>RF2040</b>	S.R	25.40	7.95	7.94	15.88	8.25			9.95	3.97
<b>RF2050</b>	S.R	31.75	9.53	10.16	19.05	10.30	12.0	5.09	15.0	2.0	27.4	4.31	0.84	1.30
<b>RF2060</b>	S.R	38.10	12.70	11.91	22.23	14.55	16.55	5.96	17.2	3.2	40.2	6.27	1.51	2.19
<b>RF2080</b>	S.R	50.80	15.88	15.88	28.58	18.30	20.90	7.94	23.0	4.0	68.6	10.70	2.41	3.52
<b>RF2100</b>	S.R	63.50	19.05	19.05	39.69	21.80	24.50	9.54	28.6	4.8	108.0	17.10	3.54	5.80
<b>RF2120</b>	S.R	76.20	25.40	22.23	44.45	26.95	30.55	11.11	34.4	5.6	151.0	23.90	5.08	8.13
<b>RF2160</b>	S.R	101.60	31.75	28.58	57.15	33.95	38.45	14.29	43.2	7.15	258.0	40.90	8.96	13.70

Måttskisser för befästningslänkar se nästa sida.  
Attachment dimensions next page.