

LÄNKHUVUD


ROD ENDS

Typ GISW - GASW

Underhållsfria

Med invändig eller utvändig gänga.
Elförzinkad och försedd med tefloninlägg.
För användning vid låga varvtal.

Typ GISW / Type GISW

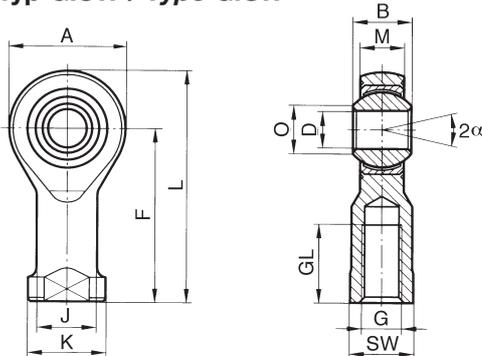


Typ GISW - GASW

Maintenance free

Rod ends with female or male thread.
Zincplated with PTFE Liner.
For use at lower revs.

Typ GASW / Type GASW

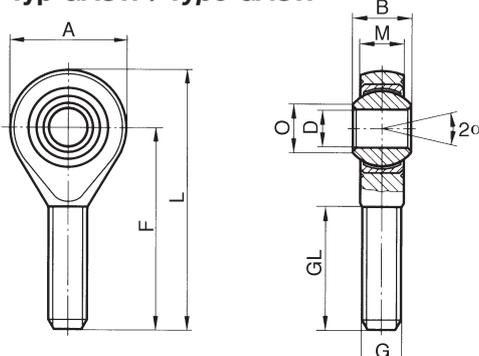

Storlek Size	B	M	A	F	L	K	J	O	SW	G	GL	Statisk belast. Static load kN	Dynamisk belast. Dynamic load kN	Max varvtal Limiting speed rpm	Vikt Weight g
GISW 5	8	6.00	18	27	36	11	9.0	7.7	9.0	M5	10	8.0	7.5	600	18
GISW 6	9	6.75	20	30	40	13	10.0	8.9	11.0	M6	12	8.9	9.3	530	27
GISW 8	12	9.00	24	36	48	16	12.5	10.4	13.0	M8	16	14.1	16.7	420	46
GISW 10	14	10.50	28	43	57	19	15.0	12.9	17.0	M10	20	19.3	23.4	350	76
GISW 12	16	12.00	32	50	66	22	17.5	15.4	19.0	M12	22	23.5	32.0	300	115
GISW 14	19	13.50	36	57	75	25	20.0	16.8	22.0	M14	25	20.8	41.9	260	170
GISW 16	21	15.00	42	64	85	27	22.0	19.3	22.0	M16	28	32.0	52.7	230	230
GISW 18	23	16.50	46	71	94	31	25.0	21.8	27.0	M18 x 1.5	32	38.6	63.8	210	320
GISW 20	25	18.00	50	77	102	34	27.5	24.3	32.0	M20 x 1.5	33	43.8	78.1	190	415
GISW 22	28	20.00	54	84	111	37	30.0	25.8	32.0	M22 x 1.5	37	52.6	97.2	170	540
GISW 25	31	22.00	60	94	124	42	33.5	29.6	36.0	M24 x 2	42	62.4	122.1	150	750
GISW 30	37	25.00	70	110	145	51	40.0	34.8	41.0	M30 x 2	51	81.6	168.4	130	1130
GISW 35	43	28.00	80	125	165	56	46.0	37.7	50.0	M36 x 2	56	100.8	205.7	110	1600
GISW 40	49	35.00	90	142	187	69	57.0	44.2	60.0	M42 x 2	60	124.0	297.1	100	2770

Storlek Size	B	M	A	F	L	O	G	GL	Statisk belast. Static load kN	Dynamisk belast. Dynamic load kN	Max varvtal Limiting speed rpm	Vikt Weight g
GASW 5	8	6.00	18	33	42	7.7	M5	20	4.3	7.5	600	13
GASW 6	9	6.75	20	36	46	8.9	M6	22	6.0	9.3	530	20
GASW 8	12	9.00	24	42	54	10.4	M8	25	11.0	16.7	420	33
GASW 10	14	10.50	28	48	62	12.9	M10	29	17.4	23.4	350	56
GASW 12	16	12.00	32	54	70	15.4	M12	33	23.5	32.0	300	87
GASW 14	19	13.50	36	60	78	16.8	M14	38	20.8	41.9	260	129
GASW 16	21	15.00	42	66	87	19.3	M16	40	32.0	52.7	230	189
GASW 18	23	16.50	46	72	95	21.8	M18 x 1.5	44	38.6	63.8	210	267
GASW 20	25	18.00	50	78	103	24.3	M20 x 1.5	47	43.8	78.1	190	348
GASW 22	28	20.00	54	84	111	25.8	M22 x 1.5	51	52.6	97.2	170	443
GASW 25	31	22.00	60	94	124	29.6	M24 x 2	58	61.4	122.1	150	600
GASW 30	37	25.00	70	110	145	34.8	M30 x 2	71	81.6	168.4	130	1030
GASW 35	43	28.00	80	125	165	37.7	M36 x 2	77	100.8	205.7	110	1600
GASW 40	49	35.00	90	142	187	44.2	M42 x 2	78	124.0	297.1	100	2570

Material:

Gänga: Höger eller vänster
Hus: T.o.m. st. 12 Automatstål 9SMnPb28K
Från st. 14 värmebehandlat stål C22
Bussning: Automatstål 9SMnPb28K med tefloninlägg på innerdiametern.
Innering: Rullagerstål 100Cr6 härdad, slipad, polerat
Denna serie kan även levereras i tätat utförande

Materials:

Thread: Left or right
Housing: Up to size 12 turned, from free-cutting steel 9SMnPb28K.
From size 14 forged from heat-treated steel C22
Insert: Free-cutting steel 9SMnPb28K with PTFE liner bonded to the inner surface
Ball: Bearing steel 100Cr6, hardened, ground, polished

This series is also available sealed