


TSUBAKI ANSI RULLKEDJOR ANTI-KORROSIVA

TSUBAKI ANSI DRIVE CHAINS CORROSION-RESISTANT

A

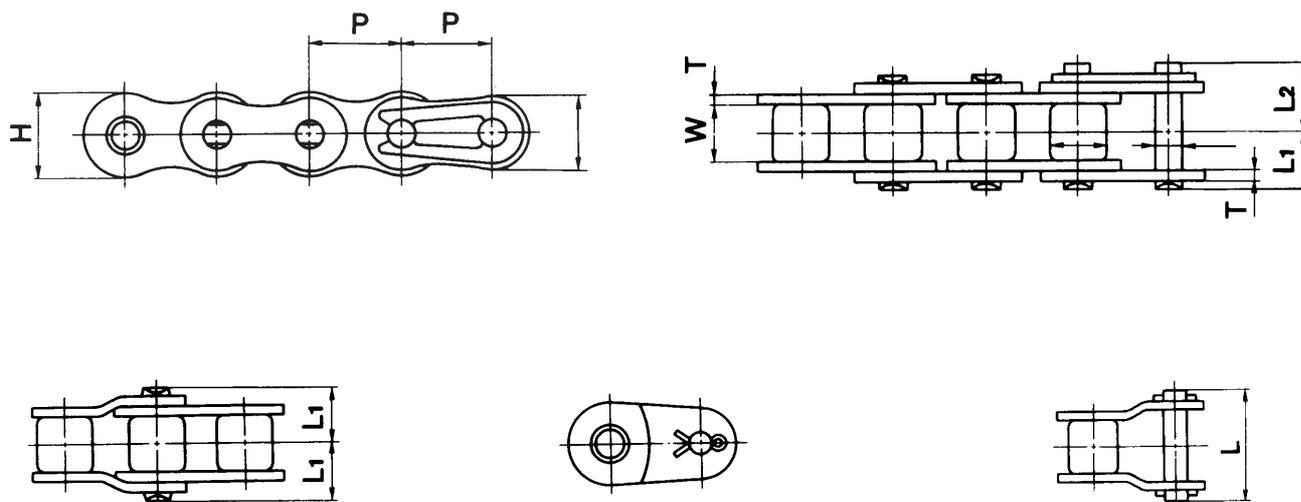

SS • NS • AS Dimensioner./ Dimensions

TSUBAKI			Del-ning Pitch	Inv. bredd Inner width	Rull dia. Roller dia.	Sidobricka Link plate			Bult dia. Pin dia.	Ca. vikt Approx mass	Bult/Pin						Max tillåten dragbelastn. Max allowable tension kN					
Kedja Nr. Chain No.						P	W	R			T	H	h	D	SS, NS			AS			SS, NS	AS
SS	NS	AS													L ₁	L ₂	L	L ₁	L ₂	L		
RS 11SS	-	-	3.746	1.83	2.285	0.38	3.50	3.50	1.57	0.052	2.275	3.165	-			0.05						
RS 25SS	RS 25NS	-	6.350	3.18	3.300	0.75	5.84	5.05	2.31	0.140	3.800	4.800	7.6			0.12						
RS 35SS	RS 35NS	-	9.525	4.78	5.080	1.25	9.00	7.80	3.59	0.330	5.850	6.850	14.7			0.26						
RS 40SS	RS40NS	RS40AS	12.700	7.95	7.940	1.50	12.00	10.40	3.97	0.640	8.250	9.950	18.6	8.25	9.95	18.6	0.44	0.69				
RS 50SS	RS 50NS	RS 50AS	15.875	9.53	10.160	2.00	15.00	13.00	5.09	1.040	10.300	12.000	23.9	10.30	12.00	23.9	0.69	1.03				
RS 60SS	RS 60NS	RS60AS	19.050	12.70	11.910	2.40	18.10	15.60	5.96	1.530	12.850	14.750	29.4	12.85	14.75	29.4	1.03	1.57				
RS 80SS	RS 80NS	RS80AS	25.400	15.88	15.880	3.20	24.10	20.80	7.94	2.660	16.250	19.250	39.0	16.25	19.25	39.0	1.77	2.65				
RS100SS	-	-	31.750	19.05	19.050	4.00	30.10	26.00	9.54	4.010	20.100	23.100	46.5			2.55						
RS120SS	-	-	38.100	25.40	22.230	5.00	36.20	31.20	11.11	6.130	25.750	29.800	59.7			3.82						
RS140SS	-	-	44.450	25.40	25.400	6.00	42.20	36.40	12.71	7.910	28.150	32.960	66.2			4.61						
RS160SS	-	-	50.800	31.75	28.580	7.00	48.20	41.60	14.29	10.860	33.550	38.950	77.3			6.37						
RS180SS	-	-	57.150	35.72	35.710	7.15	52.30	43.40	17.46	13.450	36.050	42.450	84.9			8.55						
RS200SS	-	-	63.500	39.69	39.690	8.00	60.30	52.00	19.85	16.540	39.500	45.300	90.8			10.80						
RS240SS	-	-	76.200	47.63	47.630	9.50	72.40	62.40	23.81	24.500	47.500	57.700	112.6			15.70						

Not.

1. Kedjelåset har låsfjäder från RS11 till RS60. Övriga med saxsprint.
2. NS serien har saxsprint från RS35 till RS80.
3. Kedjetyperna NS och AS endast på förfrågan.

1. RS11 to R60 have connecting link with spring clip. Larger size are cottored
2. NS version have cottored connecting link from RS 35
3. Version NS and AS on request