


VRIDSTYVA KOPPLINGAR FÖR VINKEL OCH RADIALFEL

COUPLINGS FOR ANGULAR AND RADIAL MISALIGNMENT

INKOFLEX-fläns Typ GFL

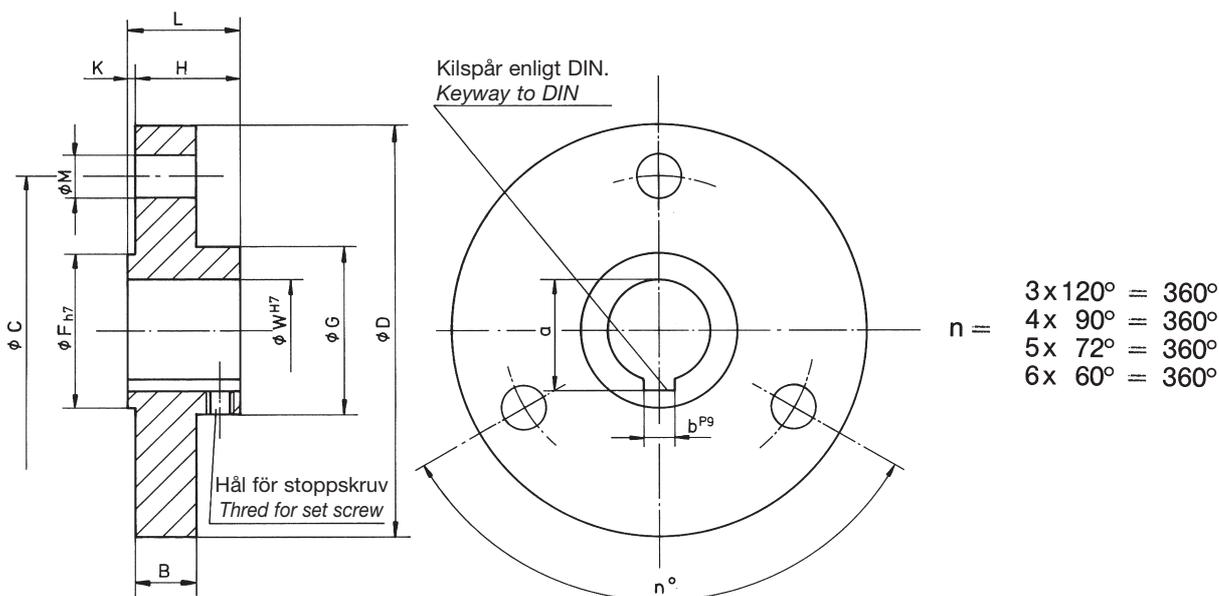

Best. Nr. Code	Måttuppgifter i mm/Dimensions in mm													J kg m2	Vikt Weight kg
	B	C	D	F	G	H	K	L	M	a	b	W	W max		
42.14.50/3	8.0	35	50	22	28	20	2	22	6.6	16.2	5	14	18	0.0005	0.16
42.16.70/4		56	70	25	35					18.2		16	22	0.0008	0.22
64.16.70/3	10.5	48	70	25	35	20	2	22	9	18.3	5	16	22	0.0010	0.38
64.25.90/4		70	90	45	55	37	3	40		28.3	8	25	40	0.0030	0.68
64.30.120/4		98	120	50	60	42		45		33.3		30	45	0.0080	1.10
78.30.120/4	15.5	90	120	50	65	42	3	45	14	33.3	8	30	45	0.0114	1.50
78.35.140/4		110	140	55	70	52		55		38.3	10	35	50	0.0208	2.00
78.40.160/4		130	160	60		52		55		43.3	12	40	55	0.0345	2.57
104.35.140/4	22.5	100	140	55	70	52	3	55	18	38.3	10	35	50	0.0290	2.78
104.40.160/4		120	160	60	85					43.3	12	40	55	0.0495	3.64
124.40.160/4	25.0	115	160	60	75	52	3	55	18	43.3	12	40	55	0.0495	3.97
124.45.180/4		135	180	70	90	62		65		48.8	14	45	60	0.0875	5.10
124.50.200/4		152	200	80	100	72		75		53.8	50	70	0.1365	6.50	
146.50.200/4	30.0	150	200	80	100	70	5	75	22	53.8	14	50	70	0.1595	7.50
146.50.200/5		200	250	100	120	80		85		64.4	18	60	80	0.3985	12.30
146.60.250/4															
146.60.250/5															
146.60.250/6		260	310	150	160	95		100		85.4	22	80	100	1.3460	25.30
146.80.310/5															
146.80.310/6															
146.80.310/8	48.0	272	325	180	180	115	5	120	22	85.4	22	80	120	2.4060	38.20
220.80.350/4															
220.80.350/5		320	375	200	200	135		140					140	4.2590	51.60
220.80.400/5															
220.80.400/6															

Måttet W (axelhålsdiam.) bör användas. / "W" is the preferred bore