

# SVETSNÄV OCH MELLANHILSOR


## WELDING HUBS AND ADAPTERS

### Svetsnav för konisk klämbussning.

Welding hub for taper bush

Material = stål / steel


Best. nr. Code	Bussn. Bushing	A	B h8	C	D	E	F
30.25	1210	70	65	64.5	25	9	10
30.40	1215	73	60	58.0	38	16	11
40.25	1610	80	75	74.5	25	9	10
40.40	1615	83	70	68.0	38	16	11
50.30	2012	95	90	89.5	32	12	12
65.45	2517	115	110	109.5	44	19	15
75.50	3020	145	140	139.5	50	19	15
75.75	3030	152	130	125.0	76	25	19
90.65	3525	190	180	179.5	65	25	25
90.90	3535	184	155	151.0	89	32	25
100.100	4040	200	190	189.5	101	32	30
115.115	4545	210	200	199.5	115	40	30
125.125	5050	230	220	219.5	127	40	35

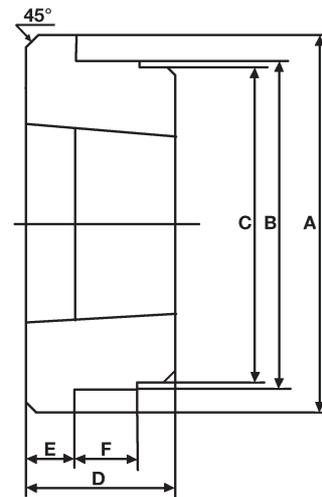

### Mellanhylsa / Adapter

Material: GG 20-25

Best. nr. Code	Typ Type	Bussning Bushing	C <sup>+0.025</sup> <sub>+0.075</sub>	B	H9 Kilbredd Key-way width	Kildjup Key-way depth
1008AM	1	1008	45	22		
1008BM	2	1008	45	22	5.0	2.5
1210AM	1	1210	60	25		
1210BM	2	1210	60	25	6.0	3.0
1215AM	1	1215	60	38		
1215BM	2	1215	60	38	6.0	3.0
1610AM	1	1610	70	25		
1610BM	2	1610	70	25	10.0	4.0
1615AM	1	1615	70	38		
1615BM	2	1615	70	38	10.0	4.0
2017AM	1	2017	90	45		
2017BM	2	2017	90	45	12.0	4.0
2517AM	1	2517	105	45		
2517BM	2	2517	105	45	16.0	4.0
2525AM	1	2525	105	64		
2525BM	2	2525	105	64	16.0	4.0
3020AM	1	3020	130	51		
3020BM	2	3020	130	51	20.0	5.0
3030AM	1	3030	130	76		
3030BM	2	3030	130	76	20.0	5.0
3535AM	1	3535	160	89		
3535BM	2	3535	160	89	22.0	5.0
4040AM	1	4040	185	102		
4040BM	2	4040	185	102	24.0	5.0

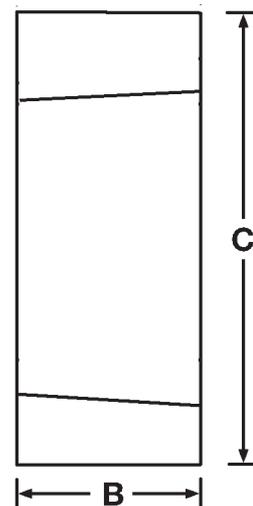

1 Utan kilspår på ytterdiametern / Without key-way on the outer diameter

2 Med kilspår på ytterdiametern / With key-way on the outer diameter