


BEFÄSTNINGSLÄNKAR FÖR TRANSPORTÖRKEDJOR

ATTACHMENTS FOR CONVEYOR CHAINS ISO/DIN

DIN 8167-ISO 1977 STANDARD

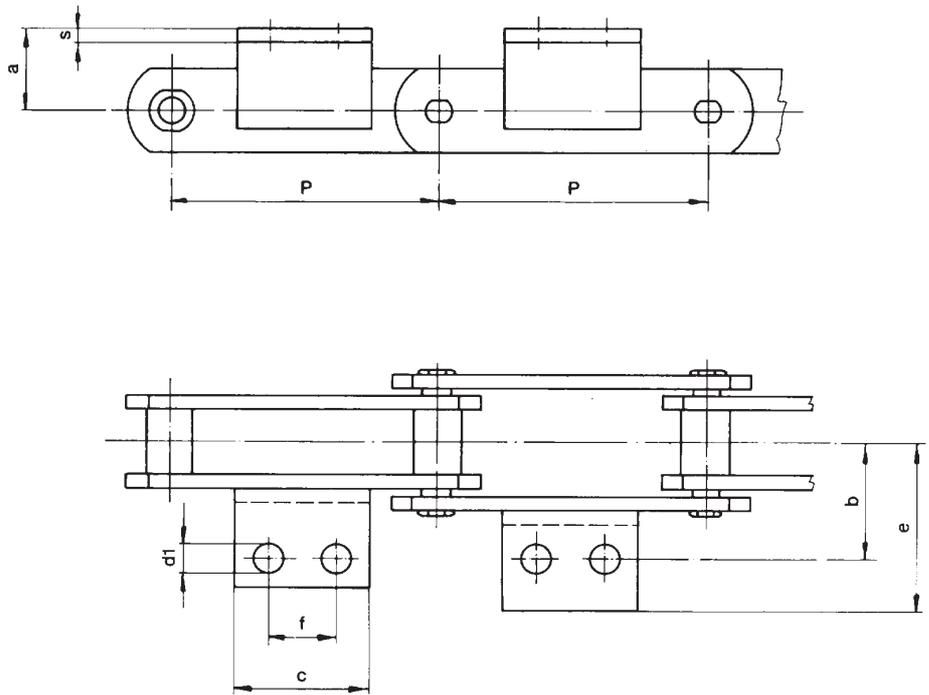

Kedja Chain mm	P mm	a mm	b mm	c mm	d1 mm	e mm	f profil	Vinkel profil Angle iron	Kedjevikt Chain weight kg/m				Tillägsvikt per vinkel Additional mass apiece kg
									Typ Type A	Typ Type B	Typ Type C	Typ Type D	
M 20	40	16	27	14	6.6	40	*	•	1.10	1.3	2.4	2.5	0.02
	50	16	27	14	6.6	40	*	•	1.01	1.3	2.0	2.1	0.02
	63	16	27	35	6.6	40	20	25X3	0.99	1.2	1.8	1.9	0.04
	80	16	27	50	6.6	40	35	25X3	0.90	1.1	1.6	1.6	0.06
M 28	50	20	32	20	9.0	47	*	20X3	1.60	1.9	3.3	3.4	0.02
	63	20	32	20	9.0	47	*	30X3	1.50	1.7	2.8	2.9	0.02
	80	20	32	45	9.0	47	25	30X3	1.40	1.6	2.5	2.6	0.05
	100	20	32	60	9.0	47	40	30X3	1.30	1.5	2.1	2.2	0.08
M 40	63	25	35	20	9.0	50	*	30X4	2.25	2.6	4.4	4.6	0.04
	80	25	35	40	9.0	50	20	30X4	2.00	2.3	3.7	3.9	0.07
	100	25	35	60	9.0	50	40	30X4	1.90	2.1	3.2	3.4	0.10
	125	25	35	85	9.0	50	65	30X4	1.80	2.0	2.9	3.0	0.15
M 56	63	30	44	22	11.0	64	*	40X4	3.40	3.9	6.8	7.2	0.05
	80	30	44	30	11.0	64	*	40X4	3.00	3.4	5.7	6.0	0.07
	100	30	44	50	11.0	64	25	40X4	2.80	3.1	5.0	5.2	0.12
	125	30	44	75	11.0	64	50	40X4	2.60	2.9	4.4	4.5	0.18
	160	30	44	110	11.0	64	85	40X4	2.54	2.7	3.9	4.1	0.27
M 80	80	35	48	30	11.0	68	*	40X4	4.70	5.4	9.2	9.4	0.07
	100	35	48	50	11.0	68	25	40X4	4.30	4.8	7.9	8.0	0.12
	125	35	48	75	11.0	68	50	40X4	4.00	4.4	6.9	7.0	0.18
	160	35	48	110	11.0	68	85	40X4	3.70	4.0	6.0	6.1	0.27
	200	35	48	150	11.0	68	125	40X4	3.50	3.8	5.3	5.4	0.36

- * Utförande med 1-hål.
- Tillverkad av plattstål.
Alla typer kan fås med 1-hål.
- * 1-hole attachment.
- Made from flat bar steel.
All attachment can be supplied with 1-hole.