


BEFÄSTNINGSLÄNKAR FÖR TRANSPORTÖRKEDJOR

ATTACHMENTS FOR CONVEYOR CHAINS ISO/DIN

DIN 8167-ISO 1977 STANDARD

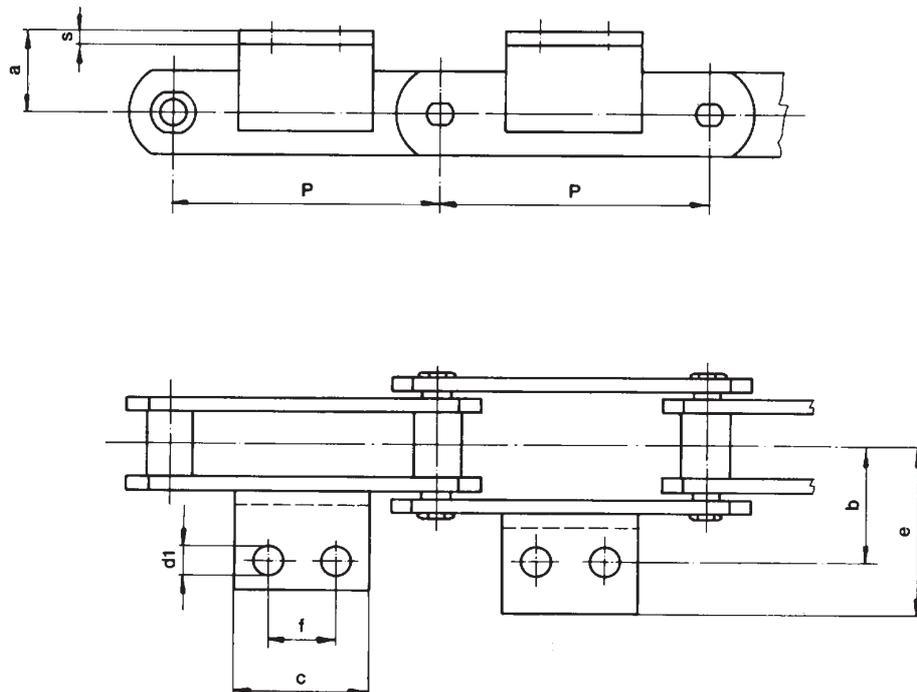

Kedja Chain	P mm	a mm	b mm	c mm	d1 mm	e mm	f mm	Vinkel profil Angle iron	Kedjevikt kg/m Chain weight kg/m				Tilläggsvikt per vinkel Additional mass apiece kg
									Typ Type A	Typ Type B	Typ Type C	Typ Type D	
									M 112	80	40	55	
	100	40	55	40	14	80	*	50x6	6.2	7.2	12.0	12.5	0.18
	125	40	55	65	14	80	35	50x6	5.7	6.5	10.4	10.8	0.30
	160	40	55	95	14	80	65	50x6	5.3	5.9	9.0	9.3	0.44
	200	40	55	130	14	80	100	50x6	5.0	5.5	7.9	8.2	0.59
M 160	100	45	62	30	14	85	*	50x6	9.7	11.2	18.9	20.2	0.13
	125	45	62	50	14	85	*	50x6	8.9	10.0	16.3	18.1	0.23
	160	45	62	80	14	85	50	50x6	8.2	9.1	14.0	15.4	0.37
	200	45	62	115	14	85	85	50x6	7.6	8.4	12.2	13.4	0.53
	250	45	62	175	14	85	145	50x6	7.3	7.9	11.0	12.0	0.80
M 224	125	55	70	35	18	100	*	60x8	13.0	14.8	25.8	26.6	0.30
	160	55	70	60	18	100	*	60x8	12.0	13.4	22.0	22.7	0.43
	200	55	70	100	18	100	65	60x8	11.0	12.1	19.0	19.5	0.71
	250	55	70	160	18	100	125	60x8	10.3	11.2	16.7	17.1	1.13
	315	55	70	225	18	100	190	60x8	9.8	10.5	14.9	15.2	1.60
M 315	160	65	80	35	18	120	*	70x9	18.3	20.4	33.3	34.6	0.32
	200	65	80	85	18	120	50	70x9	16.7	18.4	28.7	29.7	0.66
	250	65	80	135	18	120	100	70x9	15.6	17.0	25.2	26.0	1.10
	315	65	80	190	18	120	155	70x9	14.6	15.7	22.3	22.9	1.46
	400	65	80	190	18	120	155	70x9	13.9	14.8	20.0	20.5	1.46
M 450	200	75	90	40	18	125	*	70x9	24.0	27.0	40.5	47.0	0.33
	250	75	90	125	18	125	85	70x9	22.0	24.9	39.5	41.0	1.00
	315	75	90	195	18	125	155	70x9	21.0	23.0	34.5	36.0	1.60
	400	75	90	280	18	125	240	70x9	19.6	21.2	30.5	31.4	2.30

* Utförande med 1-hål.
Alla typer kan fås med
1-hål.

* 1-hole attachment
All attachment can be
supplied with 1-hole