

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 0.7 rakskurna kuggar
Module 0.7 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

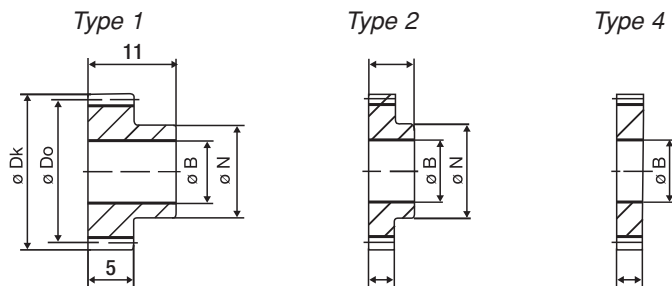

Antal tänder No of teeth					Best. Nr. Code	Md	Best. Nr. Code	Md	Best. Nr. Code	Md
Z	B	N	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)
12	3	6	9.8	8.4	S-0712-05	-	-	-	-	-
13	3	7	10.5	9.1	S-0713-05	-	-	-	-	-
14	3	8	11.2	9.8	S-0714-05	-	-	-	-	-
15	3	8	11.9	10.5	S-0715-05	-	-	-	-	-
16	4	9	12.6	11.2	S-0716-05	-	-	-	-	-
17	4	10	13.3	11.9	S-0717-05	-	-	-	-	-
18	4	10	14.0	12.6	S-0718-05	-	-	-	-	-
19	4	10	14.7	13.3	S-0719-05	-	-	-	-	-
20	4	10	15.4	14.0	S-0720-05	-	-	-	-	-
21	4	12	16.1	14.7	S-0721-05	-	-	-	-	-
22	4	12	16.8	15.4	S-0722-05	-	-	-	-	-
23	4	12	17.5	16.1	S-0723-05	-	-	-	-	-
24	4	12	18.2	16.8	S-0724-05	-	-	-	-	-
25	4	15	18.9	17.5	S-0725-05	-	-	-	-	-
26	5	15	19.6	18.2	S-0726-05	-	-	-	-	-
27	5	15	20.3	18.9	S-0727-05	-	-	-	-	-
28	5	15	21.0	19.6	S-0728-05	-	-	-	-	-
30	5	15	22.4	21.0	S-0730-05	-	-	-	-	-
32	5	15	23.8	22.4	S-0732-05	-	-	-	-	-
35	5	15	25.9	24.5	S-0735-05	-	-	-	-	-
36	5	15	26.6	25.2	S-0736-05	-	-	-	-	-
38	5	18	28.0	26.6	S-0738-05	-	-	-	-	-
40	5	18	29.4	28.0	S-0740-05	-	-	-	-	-
42	6	18	30.8	29.4	S-0742-05	-	-	-	-	-
45	6	18	32.9	31.5	S-0745-05	-	-	-	-	-
48	6	18	35.0	33.6	S-0748-05	-	-	-	-	-
50	6	18	36.4	35.0	S-0750-05	-	-	-	-	-
52	6	18	37.8	36.4	S-0752-05	-	-	-	-	-
54	6	18	39.2	37.8	S-0754-05	-	-	-	-	-
55	6	18	39.9	38.5	S-0755-05	-	-	-	-	-
56	6	18	40.6	39.2	S-0756-05	-	-	-	-	-
60	6	18	43.4	42.0	S-0760-05	-	-	-	-	-
64	6	18	46.2	44.8	S-0764-05	-	-	-	-	-
65	6	18	46.9	45.5	S-0765-05	-	-	-	-	-
70	6	18	50.4	49.0	S-0770-05	-	-	-	-	-
72	6	20	51.8	50.4	S-0772-05	-	-	-	-	-
75	6	20	53.9	52.5	S-0775-05	-	-	-	-	-
80	6	20	57.4	56.0	S-0780-05	-	-	-	-	-
85	6	20	60.9	59.5	S-0785-05	-	-	-	-	-
90	6	20	64.4	63.0	S-0790-05	-	-	-	-	-
96	8	25	68.6	67.2	S-0796-05	-	-	-	-	-
100	8	25	71.4	70.0	S-07100-05	-	-	-	-	-
120	8	25	85.4	84.0	S-07120-05	-	-	-	-	-