
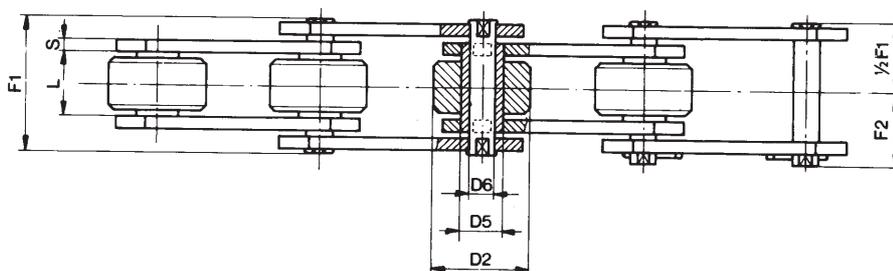


TRANSPORTÖRKEDJOR ISO/DIN

CONVEYOR CHAINS ISO/DIN

FÖRHÖJD SIDBRICKA/ DEEP LINK CHAINS

DIN 8167-ISO 1977 STANDARD

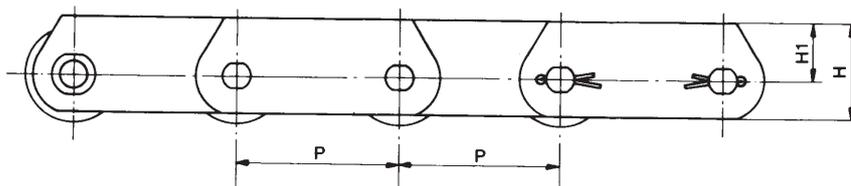

Kedja Chain	P	L	D2	D5	D6	H	H1	S	F1	F2	Brottlast Breaking Load		Vikt Weight kg/m
											N	N *	
	40	16	25	9	6	25	16.0	2.5	31	18	20,000	40,000	3.0
	50	16	25	9	6	25	16.0	2.5	31	18	20,000	40,000	2.6
	63	16	25	9	6	25	16.0	2.5	31	18	20,000	40,000	2.3
	80	16	25	9	6	25	16.0	2.5	31	18	20,000	40,000	2.0
	50	18	30	10	7	30	20.0	3.0	35	20	28,000	55,000	4.1
	63	18	30	10	7	30	20.0	3.0	35	20	28,000	55,000	3.5
	80	18	30	10	7	30	20.0	3.0	35	20	28,000	55,000	3.1
	100	18	30	10	7	30	20.0	3.0	35	20	28,000	55,000	2.8
	63	20	36	11	8	35	22.5	4.0	41	23	40,000	70,000	5.5
	80	20	36	11	8	35	22.5	4.0	41	23	40,000	70,000	4.8
	100	20	36	11	8	35	22.5	4.0	41	23	40,000	70,000	4.2
	125	20	36	11	8	35	22.5	4.0	41	23	40,000	70,000	3.7
ME56	63	24	42	15	10	45	30.0	4.0	46	26	56,000	80,000	8.3
	80	24	42	15	10	45	30.0	4.0	46	26	56,000	80,000	7.0
	100	24	42	15	10	45	30.0	4.0	46	26	56,000	80,000	6.1
	125	24	42	15	10	45	30.0	4.0	46	26	56,000	80,000	5.4
	80	28	50	18	12	50	32.5	5.0	55	31	80,000	120,000	11.0
	100	28	50	18	12	50	32.5	5.0	55	31	80,000	120,000	9.5
	125	28	50	18	12	50	32.5	5.0	55	31	80,000	120,000	8.5
	160	28	50	18	12	50	32.5	5.0	55	31	80,000	120,000	7.2
	200	28	50	18	12	50	32.5	5.0	55	31	80,000	120,000	6.0

Följande specialutförande på förfrågan:

- Ytbehandling: Nickel, zink, kadmium.
- Rostfritt utförande.

* Högre brottslast p.g.a härdade sidobrickor

Special arrangements on request:

- Plating such as nickel-zinc-cadmium
- In stainless steel

* Higher breaking load with hardened plates