


TRANSPORTÖRKEDJOR ISO/DIN

CONVEYOR CHAINS ISO/DIN

FÖRHÖJD SIDOBRICKA/ DEEP LINK CHAINS

DIN 8167-ISO 1977 STANDARD

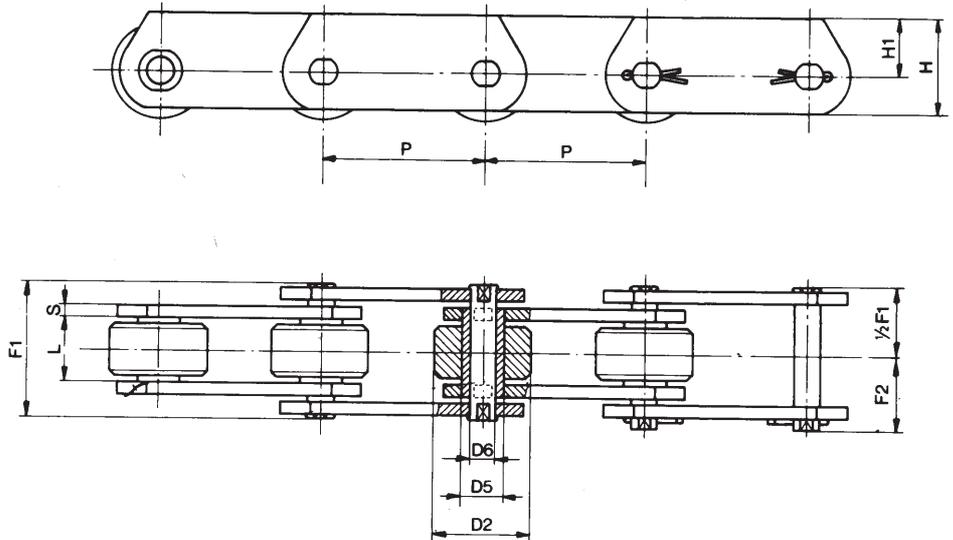

Kedja Chain	P mm	L mm	D2 mm	D5 mm	D6 mm	H mm	H1 mm	S mm	F1 mm	F2 mm	Brottlast Breaking Load		Vikt Weight Kg/m
											N	N *	
	80	32	60	21	15	60	40	6	64	36	112,000	180,000	17.0
	100	32	60	21	15	60	40	6	64	36	112,000	180,000	14.5
	125	32	60	21	15	60	40	6	64	36	112,000	180,000	13.0
	160	32	60	21	15	60	40	6	64	36	112,000	180,000	11.0
	200	32	60	21	15	60	40	6	64	36	112,000	180,000	10.0
	100	37	70	25	18	70	45	7	73	41	160,000	270,000	21.5
	125	37	70	25	18	70	45	7	73	41	160,000	270,000	19.0
	160	37	70	25	18	70	45	7	73	41	160,000	270,000	17.0
	200	37	70	25	18	70	45	7	73	41	160,000	270,000	15.0
	250	37	70	25	18	70	45	7	73	41	160,000	270,000	13.5
	125	43	85	30	21	90	60	8	84	47	224,000	370,000	32.5
	160	43	85	30	21	90	60	8	84	47	224,000	370,000	27.5
	200	43	85	30	21	90	60	8	84	47	224,000	370,000	23.0
	250	43	85	30	21	90	60	8	84	47	224,000	370,000	21.0
	315	43	85	30	21	90	60	8	84	47	224,000	370,000	19.0
	160	48	100	36	25	100	65	10	98	57	315,000	540,000	43.0
	200	48	100	36	25	100	65	10	98	57	315,000	540,000	37.0
	250	48	100	36	25	100	65	10	98	57	315,000	540,000	32.0
	315	48	100	36	25	100	65	10	98	57	315,000	540,000	28.6
	400	48	100	36	25	100	65	10	98	57	315,000	540,000	25.5
	200	56	120	42	30	120	80	12	115	70	450,000	800,000	47.0
	250	56	120	42	30	120	80	12	115	70	450,000	800,000	41.0
	315	56	120	42	30	120	80	12	115	70	450,000	800,000	36.0
	400	56	120	42	30	120	80	12	115	70	450,000	800,000	32.0

Följande specialutförande på förfrågan:

- Ytbehandling: Nickel, zink, kadmium.
- Rostfritt utförande.

* Högre brottslast p.g.a härdade sidobrickor

Special arrangements on request:

- Plating such as nickel-zinc-cadmium
- In stainless steel

* Higher breaking load with hardened plates