



TSUBAKI MOTORCYKELKEDJOR

TSUBAKI MOTORCYCLE CHAINS


QR serie

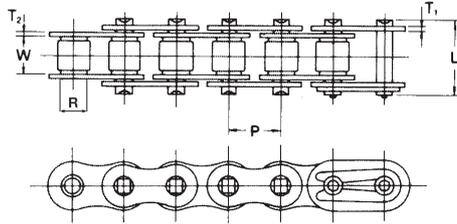


O-ring serie Omega

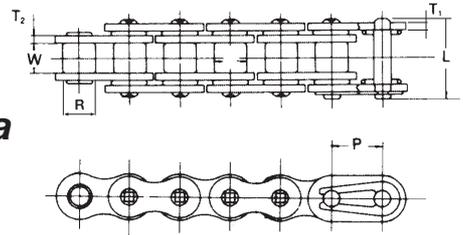


HQR serie

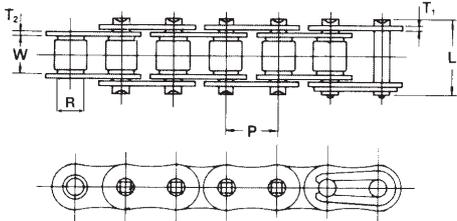

HSL serie

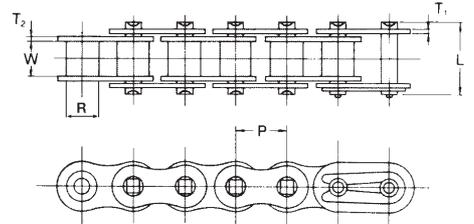

XQR serie

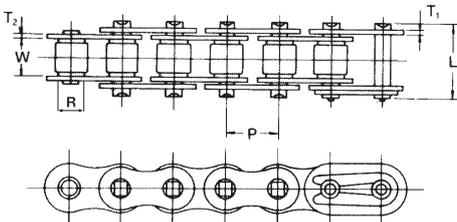

TSUBAKI	Delning	Rull diam.	Inv. bredd	Tjocklek ytterlänk	Tjocklek innerlänk	Bulltlängd	Genomsn. draghåll- fasthet	Vikt
Kedja Nr.	Pitch	Roller dia.	Inner width	Thickness outer link	Thickness inner link	Pin lenght	Average tensile strength	Weight
Chain No.	P	R	W	T ₁	T ₂	L	kP	kg/m
420	12.700	7.77	6.35	1.50	1.50	15.80	1,900	0.59
425	12.700	7.94	7.94	1.50	1.50	18.20	1,900	0.64
428	12.700	8.50	7.94	1.50	1.50	18.10	1,900	0.75
428H	12.700	8.50	7.94	2.00	2.00	20.00	2,400	0.81
520QR	15.875	10.16	6.35	2.00	2.00	20.10	3,200	0.95
525QR	15.875	10.16	7.94	2.00	2.00	20.90	3,200	0.99
530QR	15.875	10.16	9.53	2.00	2.00	22.80	3,200	1.04
630QR	19.050	11.91	9.53	2.40	2.40	24.80	4,550	1.39
530HQR	15.875	10.16	9.53	2.40	2.40	23.90	4,820	1.41
520XQR	15.875	10.16	6.35	2.00	2.00	20.10	3,200	0.95
630 Ω Omega	19.050	11.91	9.53	2.40	2.40	26.30	4,550	1.50
420HSL	12.700	7.77	6.35	1.50	2.00	18.20	1,850	0.64
428HSL	12.700	8.51	7.94	1.50	2.00	19.60	1,700	0.72
520HSL	15.875	10.16	6.35	2.00	2.80	21.60	3,200	1.05
525HSL	15.875	10.16	7.94	2.00	2.80	23.15	3,200	1.10
530HSL	15.875	10.16	9.53	2.00	2.80	24.70	3,200	1.14
630HSL	19.050	11.91	9.53	2.40	3.50	27.30	4,550	1.58

Kedjorna kan också fås förnicklade.
För motorcyklar med höga effekter skall endast nitlänk användas.

*The chains can also be supplied Nickel plated.
For connecting the chain on motorcycles with high power, pin link should only be used.*