

STÅLAGER

PILLOW BLOCK

UCP 2 • UCP 3

(låsnings med stoppskruv)

(Set screw locking)


EWP 2 • EWP 3

(låsnings med excentrisk låsring)

(eccentric locking collar)

Axelhåll 12-140mm

Shaft dia. 12-140mm

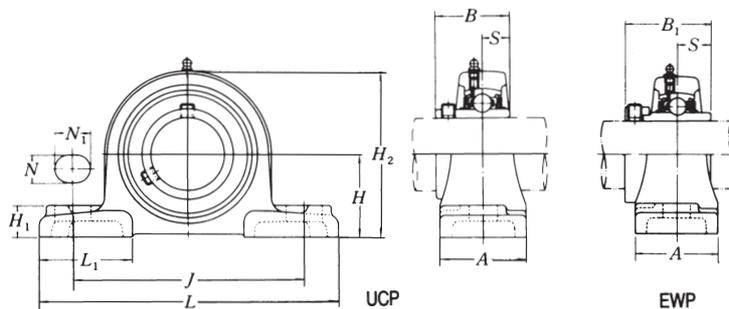

Best. nr. Code	Axelhåll Shaft dia.	Mått i mm / Dimension in mm												Bult st. Bolt size	Vikt Weight kg
		L	A	J	H	N	N ₁	H ₁	H ₂	L ₁	B	B ₁	S		
UCP 201	12	127	38	95	30.2	13	19	15	62	42	31.0	-	12.7	M 10	0.70
UCP 202	15	127	38	95	30.2	13	19	15	62	42	31.0	-	12.7	M 10	0.69
UCP 203	17	127	38	95	30.2	13	19	15	62	42	31.0	-	12.7	M 10	0.68
UCP 204	20	127	38	95	33.3	13	19	15	65	42	31.0	-	12.7	M 10	0.68
EWP 204	20	127	38	95	33.3	13	19	15	65	42	-	43.7	17.1	M 10	0.73
UCP 205	25	140	38	105	36.5	13	19	16	70	42	34.0	-	14.3	M 10	0.82
EWP 205	25	140	38	105	36.5	13	19	16	70	42	-	44.4	17.5	M 10	0.86
UCP 305	25	175	45	132	45.0	17	20	16	83	54	38.0	-	15.0	M 14	1.32
EWP 305	25	175	45	132	45.0	17	20	16	83	54	-	46.8	16.7	M 14	1.39
UCP 206	30	165	48	121	42.9	17	21	18	83	54	38.1	-	15.9	M 14	1.36
EWP 206	30	165	48	121	42.9	17	21	18	83	54	-	48.4	18.3	M 14	1.42
UCP 306	30	180	50	140	50.0	17	20	19	94	56	43.0	-	17.0	M 14	1.82
EWP 306	30	180	50	140	50.0	17	20	19	94	56	-	50.0	17.5	M 14	1.93
UCP 207	35	167	48	127	47.6	17	21	19	94	54	42.9	-	17.5	M 14	1.73
EWP 207	35	167	48	127	47.6	17	21	19	94	54	-	51.1	18.8	M 14	1.86
UCP 307	35	210	56	160	56.0	17	25	21	105	65	48.0	-	19.0	M 14	2.50
EWP 307	35	210	56	160	56.0	17	25	21	105	65	-	51.6	18.3	M 14	2.60
UCP 208	40	184	54	137	49.2	17	23	19	100	52	49.2	-	19.0	M 14	2.10
EWP 208	40	184	54	137	49.2	17	23	19	100	52	-	56.3	21.4	M 14	2.20
UCP 308	40	220	60	170	60.0	17	27	23	116	68	52.0	-	19.0	M 14	3.20
EWP 308	40	220	60	170	60.0	17	27	23	116	68	-	57.1	19.8	M 14	3.40
UCP 209	45	190	54	146	54.0	17	23	20	108	60	49.2	-	19.0	M 14	2.30
EWP 209	45	190	54	146	54.0	17	23	20	108	60	-	56.3	21.4	M 14	2.40
UCP 309	45	245	67	190	67.0	20	30	25	128	76	57.0	-	22.0	M 16	4.30
EWP 309	45	245	67	190	67.0	20	30	25	128	76	-	58.7	19.8	M 16	2.90
UCP 210	50	206	60	159	57.2	20	25	22	114	65	51.6	-	19.0	M 16	2.70
EWP 210	50	206	60	159	57.2	20	25	22	114	65	-	62.7	24.6	M 16	2.90
UCP 310	50	275	75	212	75.0	20	35	28	143	85	61.0	-	22.0	M 16	5.80
EWP 310	50	275	75	212	75.0	20	35	28	143	85	-	66.6	24.6	M 16	6.00
UCP 211	55	219	60	171	63.5	20	25	22	126	70	55.6	-	22.2	M 16	3.40
EWP 211	55	219	60	171	63.5	20	25	22	126	70	-	71.4	27.8	M 16	3.60
UCP 311	55	310	80	236	80.0	20	38	31	154	96	66.0	-	25.0	M 16	7.40
EWP 311	55	310	80	236	80.0	20	38	31	154	96	-	73.0	27.8	M 16	7.60
UCP 212	60	241	70	184	69.8	20	25	25	138	70	65.1	-	25.4	M 16	4.80
EWP 212	60	241	70	184	69.8	20	25	25	138	70	-	77.8	31.0	M 16	5.00
UCP 312	60	330	85	250	85.0	25	38	33	165	102	71.0	-	26.0	M 20	9.00
EWP 312	60	330	85	250	85.0	25	38	33	165	102	-	79.4	31.0	M 20	9.40
UCP 213	65	265	70	203	76.2	25	29	27	150	77	65.1	-	25.4	M 20	5.70
EWP 213	65	265	70	203	76.2	25	29	27	150	77	-	85.7	34.1	M 20	6.20
UCP 313	65	340	90	260	90.0	25	38	36	174	105	75.0	-	30.0	M 20	10.20
EWP 313	65	340	90	260	90.0	25	38	36	174	105	-	85.7	32.5	M 20	10.80
UCP 214	70	266	72	210	79.4	25	31	27	156	83	74.6	-	30.2	M 20	6.40
EWP 214	70	266	72	210	79.4	25	31	27	156	83	-	85.7	34.1	M 20	6.90
UCP 314	70	360	90	280	95.0	27	40	40	186	105	78.0	-	33.0	M 22	12.40
EWP 314	70	360	90	280	95.0	27	40	40	186	105	-	92.1	34.1	M 22	13.10
UCP 215	75	275	74	217	82.6	25	31	28	163	85	77.8	-	33.3	M 20	7.20
EWP 215	75	275	74	217	82.6	25	31	28	163	85	-	92.1	37.3	M 20	7.60
UCP 315	75	380	100	290	100.0	27	40	40	197	120	82.0	-	32.0	M 22	14.60
EWP 315	75	380	100	290	100.0	27	40	40	197	120	-	100.0	37.3	M 22	15.80