

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 1.25 rakskurna kuggar
Module 1.25 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

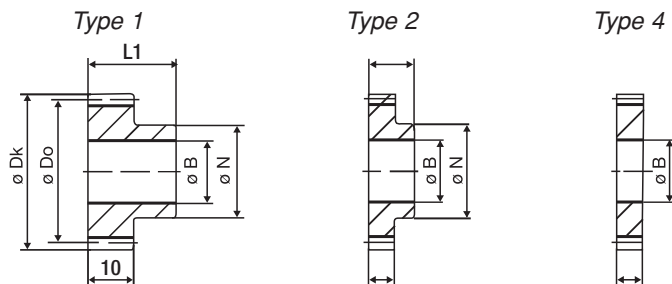

Antal tänder No of teeth					Best. Nr. Code	Md 1)	Best. Nr. Code	Md 1)	Best. Nr. Code	Md
Z	B	N	Dk	Do	Type 1	L1 (Nm)	Type 2	(Nm)	Type 4	(Nm)
12	5	12	17.50	15.00	S-1212-10	20 -	-	-	-	-
13	5	12	18.75	16.25	S-1213-10	20 -	-	-	-	-
14	5	12	20.00	17.50	S-1214-10	20 -	-	-	-	-
15	6	15	21.25	18.75	S-1215-10	20 -	-	-	-	-
16	6	15	22.50	20.00	S-1216-10	20 -	-	-	-	-
17	6	15	23.75	21.25	S-1217-10	20 -	-	-	-	-
18	6	15	25.00	22.50	S-1218-10	20 -	-	-	-	-
19	6	15	26.25	23.75	S-1219-10	20 -	-	-	-	-
20	6	15	27.50	25.00	S-1220-10	20 -	-	-	-	-
21	8	20	28.75	26.25	S-1221-10	20 -	-	-	-	-
22	8	20	30.00	27.50	S-1222-10	20 -	-	-	-	-
23	8	20	31.25	28.75	S-1223-10	20 -	-	-	-	-
24	8	20	32.50	30.00	S-1224-10	20 -	-	-	-	-
25	8	20	33.75	31.25	S-1225-10	20 -	-	-	-	-
26	8	20	35.00	32.50	S-1226-10	20 -	-	-	-	-
27	8	20	36.25	33.75	S-1227-10	20 -	-	-	-	-
28	8	20	37.50	35.00	S-1228-10	20 -	-	-	-	-
30	10	25	40.00	37.50	S-1230-10	20 -	-	-	-	-
32	10	25	42.50	40.00	S-1232-10	20 -	-	-	-	-
35	10	25	46.25	43.75	S-1235-10	20 -	-	-	-	-
36	10	25	47.50	45.00	S-1236-10	20 -	-	-	-	-
38	10	25	50.00	47.50	S-1238-10	20 -	-	-	-	-
40	10	30	52.50	50.00	S-1240-10	20 -	-	-	-	-
42	10	30	55.00	52.50	S-1242-10	22 -	-	-	-	-
48	10	30	62.50	60.00	S-1248-10	22 -	-	-	-	-
50	10	30	65.00	62.50	S-1250-10	22 -	-	-	-	-
52	10	40	67.50	65.00	S-1252-10	22 -	-	-	-	-
54	10	40	70.00	67.50	S-1254-10	22 -	-	-	-	-
55	10	40	71.25	68.75	S-1255-10	22 -	-	-	-	-
56	10	40	72.50	70.00	S-1256-10	22 -	-	-	-	-
60	10	40	77.50	75.00	S-1260-10	22 -	-	-	-	-
64	10	40	82.50	80.00	S-1264-10	22 -	-	-	-	-
65	10	40	83.75	81.25	S-1265-10	22 -	-	-	-	-
70	12	40	90.00	87.50	S-1270-10	22 -	-	-	-	-
72	12	40	92.50	90.00	S-1272-10	22 -	-	-	-	-
80	12	50	102.5	100.00	S-1280-10	22 -	-	-	-	-
85	12	50	108.75	106.25	S-1285-10	22 -	-	-	-	-
90	12	50	115.00	112.50	S-1290-10	22 -	-	-	-	-

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.
 1) With safetyfaktor 1.4 för tooth root stress.