


KULLÄNKAR

BALL COUPLING

Precisionskullänk / Precision Ball Coupling
DIN 808

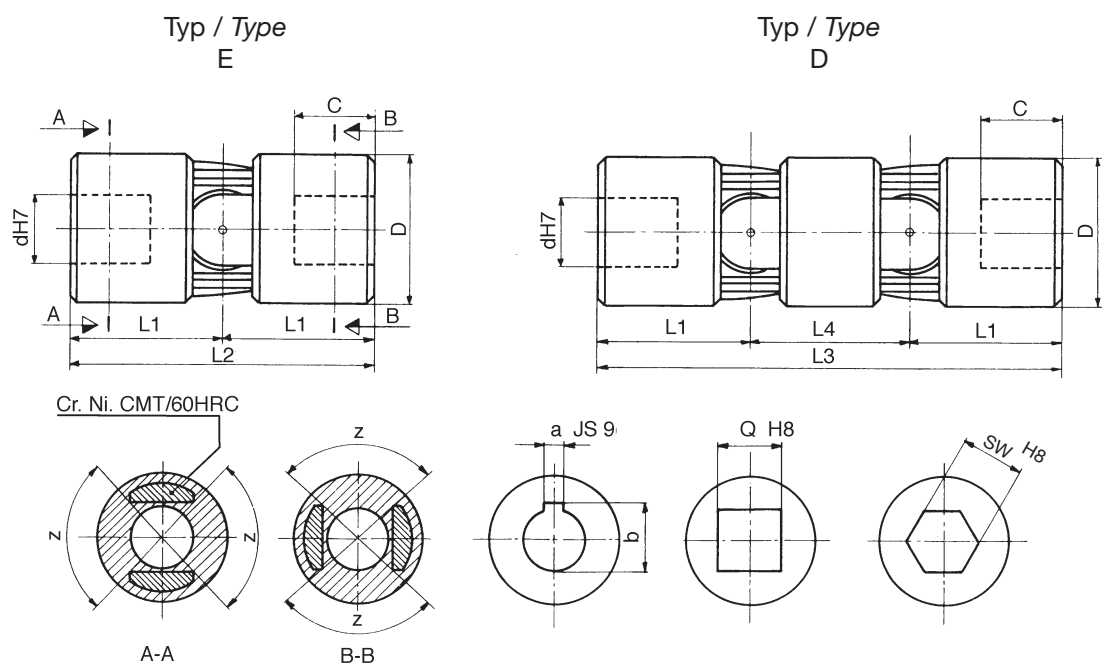

Z = Borr zon / Drill zone

Best Nr. Code	Best Nr. Code	d	D	L2	L1	C	L4	L3	a	b	Q	SW	Vikt / Weight Kg	
													E	D
E6	-	6	16	34	17.0	9	-	-	-	-	6	6	0.05	-
E8	-	8	18	40	20.0	11	-	-	-	-	8	8	0.06	-
E10	-	10	22	48	24.0	14	-	-	3	11.4	10	10	0.11	-
E12	D12	12	26	56	28.0	16	24	80	4	13.8	12	12	0.17	0.32
E14	D14	14	29	60	30.0	17	29	89	5	16.3	14	14	0.22	0.42
E16	D16	16	32	68	34.0	20	36	104	5	18.3	16	16	0.32	0.47
E18	D18	18	37	74	37.0	21	40	114	6	20.8	18	18	0.47	0.72
E20	D20	20	42	82	41.0	23	45	127	6	22.8	20	20	0.67	1.00
E22	D22	22	47	95	47.5	25	50	145	6	24.8	22	22	1.00	1.56
E25	D25	25	52	108	54.0	29	55	163	8	28.3	25	25	1.35	2.10
E30	D30	30	58	122	61.0	34	60	182	8	33.3	30	30	1.85	2.75
E35	D35	35	70	140	70.0	39	72	212	10	38.3	35	-	3.15	4.75
E40	D40	40	80	160	80.0	44	85	245	12	43.3	40	-	4.60	7.20
E50	D50	50	95	190	95.0	54	100	290	14	53.8	50	-	7.60	12.00