

# STÅL OCH FLÄNSLAGER MED LAGERHUS I PLÅT

## PILLOW AND FLANGE UNITS WITH PRESSED STEEL HOUSING

### UBPFL 2


(låsnings med stoppskruv)  
(set screw locking)

### ENPFL 2

(låsnings med excentrisk låsring)  
(eccentric locking collar)

Axelhål 12-35mm

Shaft dia. 12-35mm

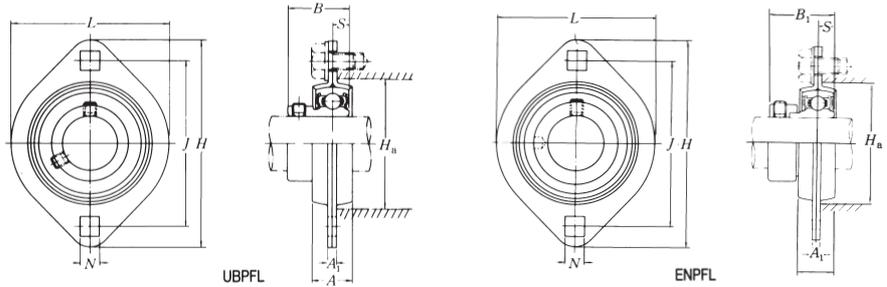

Best. nr. Code	Axelhål Shaft dia.	Mått i mm / Dimensions in mm										Bult st. Bolt size	Vikt Weight kg
		H	J	A	A <sub>1</sub>	N	L	Ha min	B	B <sub>1</sub>	S		
UBPFL 201	12	81	63.5	14	4.0	7	59	49	22.0	-	6.0	M 6	0.22
ENPFL 201	12	81	63.5	14	4.0	7	59	49	-	28.6	6.5	M 6	0.26
UBPFL 202	15	81	63.5	14	4.0	7	59	49	22.0	-	6.0	M 6	0.21
ENPFL 202	15	81	63.5	14	4.0	7	59	49	-	28.6	6.5	M 6	0.25
UBPFL 203	17	81	63.5	14	4.0	7	59	49	22.0	-	6.0	M 6	0.20
ENPFL 203	17	81	63.5	14	4.0	7	59	49	-	28.6	6.5	M 6	0.23
UBPFL 204	20	90	71.4	16	4.0	9	67	56	24.7	-	7.0	M 8	0.27
ENPFL 204	20	90	71.4	16	4.0	9	67	56	-	31.0	7.5	M 8	0.32
UBPFL 205	25	95	76.2	18	4.0	9	71	60	27.0	-	7.5	M 8	0.33
ENPFL 205	25	95	76.2	18	4.0	9	71	60	-	31.0	7.5	M 8	0.38
UBPFL 206	30	113	90.5	18	5.2	11	84	71	30.3	-	8.0	M 10	0.54
ENPFL 206	30	113	90.5	18	5.2	11	84	71	-	35.7	9.0	M 10	0.62
UBPFL 207	35	125	100.0	20	5.2	11	94	81	32.9	-	8.5	M 10	0.71
ENPFL 207	35	125	100.0	20	5.2	11	94	81	-	38.9	9.5	M 10	0.86

UBPFL / ENPFL är försedda med smörjfria lager.  
UBPFL / ENPFL have lub-free bearings