

CYLINDRISKA KUGGHJUL I STÅL


STEEL SPURGEARS

Modul 2.5 rakskurna kuggar
Module 2.5 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: SS 1672
 Material: SS 1672

Toleranser: B = H7
 Tolerance: B = H7

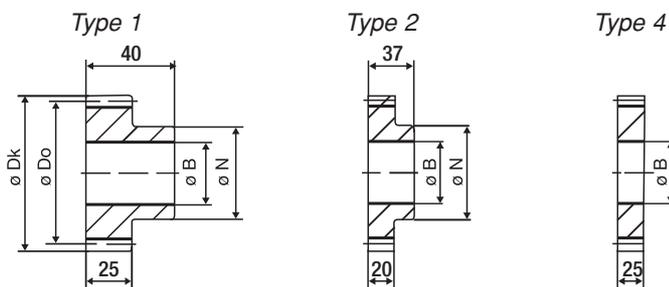

Antal tänder No of teeth		Best. Nr. Code			Md 1)	Best. Nr. Code			Md 1)	Best. Nr. Code			Md 1)
Z	B	N	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)			
12	10	24	35.0	30.0	S-2512-25	-	S-2512-20	-	-	-			
13	10	24	37.5	32.5	S-2513-25	-	-	-	-	-			
14	15	28	40.0	35.0	S-2514-25	-	S-2514-20	-	-	-			
15	15	30	42.5	37.5	S-2515-25	-	S-2515-20	-	-	-			
16	15	30	45.0	40.0	S-2516-25	-	S-2516-20	-	-	-			
17	15	30	47.5	42.5	S-2517-25	-	-	-	-	-			
18	15	35	50.0	45.0	S-2518-25	-	S-2518-20	-	-	-			
19	15	35	52.5	47.5	S-2519-25	-	-	-	-	-			
20	15	40	55.0	50.0	S-2520-25	-	S-2520-20	-	-	-			
21	15	45	57.5	52.5	S-2521-25	-	S-2521-20	-	-	-			
22	15	45	60.0	55.0	S-2522-25	-	S-2522-20	-	-	-			
23	15	45	62.5	57.5	S-2523-25	-	-	-	-	-			
24	15	50	65.0	60.0	S-2524-25	21.6	S-2524-20	17.3	-	-			
25	15	55	67.5	62.5	S-2525-25	23.2	S-2525-20	-	-	-			
26	15	55	70.0	65.0	S-2526-25	25.5	-	-	-	-			
27	15	60	72.5	67.5	S-2527-25	27.1	-	-	-	-			
28	15	60	75.0	70.0	S-2528-25	29.1	S-2528-20	21.0	-	-			
29	15	60	77.5	72.5	S-2529-25	31.0	-	-	-	-			
30	15	65	80.0	75.0	S-2530-25	33.0	S-2530-20	26.6	-	-			
31	20	65	82.5	77.5	S-2531-25	35.4	-	-	-	-			
32	20	70	85.0	80.0	S-2532-25	37.7	S-2532-20	30.2	-	-			
33	20	70	87.5	82.5	S-2533-25	40.1	-	-	-	-			
34	20	70	90.0	85.0	S-2534-25	42.4	-	-	-	-			
35	20	70	92.5	87.5	S-2535-25	44.8	-	-	-	-			
36	20	70	95.0	90.0	S-2536-25	47.1	S-2536-20	37.7	-	-			
37	20	75	97.5	92.5	S-2537-25	49.5	-	-	-	-			
38	20	75	100.0	95.0	S-2538-25	51.8	-	-	-	-			
39	20	80	102.5	97.5	S-2539-25	54.2	-	-	-	-			
40	20	80	105.0	100.0	S-2540-25	56.5	S-2540-20	45.2	-	-			
41	20	80	107.5	102.5	S-2541-25	58.9	-	-	-	-			
42	20	80	110.0	105.0	S-2542-25	61.2	S-2542-20	49.8	-	-			
43	20	90	112.5	107.5	S-2543-25	63.6	-	-	-	-			
44	20	90	115.0	110.0	S-2544-25	66.0	-	-	-	-			
45	20	90	117.5	112.5	S-2545-25	68.4	S-2545-20	53.0	-	-			
46	20	90	120.0	115.0	S-2546-25	70.8	-	-	-	-			
47	20	90	122.5	117.5	S-2547-25	73.2	-	-	-	-			
48	20	90	125.0	120.0	S-2548-25	75.6	S-2548-20	58.0	-	-			
49	20	90	127.5	122.5	S-2549-25	78.0	-	-	-	-			
50	20	100	130.0	125.0	S-2550-25	80.4	S-2550-20	63.0	-	-			
51	20	100	132.5	127.5	S-2551-25	82.8	-	-	-	-			
52	25	100	135.0	130.0	S-2552-25	85.2	S-2552-20	68.0	-	-			
53	25	100	137.5	132.5	S-2553-25	87.6	-	-	-	-			
54	25	100	140.0	135.0	S-2554-25	90.0	S-2554-20	73.0	-	-			
55	25	100	142.5	137.5	S-2555-25	92.4	-	-	-	-			
56	25	100	145.0	140.0	S-2556-25	94.8	S-2556-20	78.0	-	-			
57	25	100	147.5	142.5	S-2557-25	97.2	-	-	-	-			
58	25	100	150.0	145.0	S-2558-25	99.6	-	-	-	-			
59	25	100	152.5	147.5	S-2559-25	102.0	-	-	-	-			
60	25	100	155.0	150.0	S-2560-25	104.4	S-2560-20	83.0	-	-			
61	25	100	157.5	152.5	S-2561-25	106.8	-	-	-	-			
62	25	100	160.0	155.0	S-2562-25	109.2	-	-	-	-			
63	25	100	162.5	157.5	S-2563-25	111.6	-	-	-	-			
64	25	100	165.0	160.0	S-2564-25	114.0	-	-	-	-			
65	25	100	167.5	162.5	S-2565-25	116.4	-	-	-	-			
66	25	100	170.0	165.0	S-2566-25	118.8	-	-	-	-			
67	25	100	172.5	167.5	S-2567-25	121.2	-	-	-	-			
68	25	100	175.0	170.0	S-2568-25	123.6	-	-	-	-			
69	25	100	177.5	172.5	S-2569-25	126.0	-	-	-	-			
70	25	100	180.0	175.0	S-2570-25	128.4	-	-	-	-			
72	25	100	185.0	180.0	S-2572-25	133.6	S-2572-20	106.0	-	-			
73	25	100	187.5	182.5	S-2573-25	136.0	-	-	-	-			
75	30	100	192.5	187.5	S-2575-25	141.6	-	-	SP-2575-25	-			
76	30	100	195.0	190.0	S-2576-25	144.0	-	-	-	-			
78	30	100	200.0	195.0	S-2578-25	150.0	-	-	-	-			
80	30	100	205.0	200.0	S-2580-25	156.0	-	-	-	-			
82	25	-	210.0	205.0	-	-	-	-	SP-2582-25	-			
85	20	-	217.5	212.5	-	-	-	-	SP-2585-25	-			
90	20	100	230.0	225.0	S-2590-25	179.0	-	-	SP-2590-25	-			
95	25	-	242.5	237.5	-	-	-	-	SP-2595-25	-			
100	25	-	255.0	250.0	-	-	-	-	SP-25100-25	-			
110	25	-	280.0	275.0	-	-	-	-	SP-25110-25	-			
114	25	-	290.0	285.0	-	-	-	-	SP-25114-25	-			
120	25	-	305.0	300.0	-	-	-	-	SP-25120-25	253.0			
127	25	-	322.5	317.5	-	-	-	-	SP-25127-25	-			

1) Med säkerhetsfaktor 1.4 för kuggfotsutmattning.

1) With safetyfaktor 1.4 för tooth root stress.