


KILREMSSKIVOR I ALUMINIUM, FÖRBORRADE

V-BELT PULLEYS IN ALUMINIUM, PILOT BORE

Profil Z/SPZ/3V

Profile Z/SPZ/3V

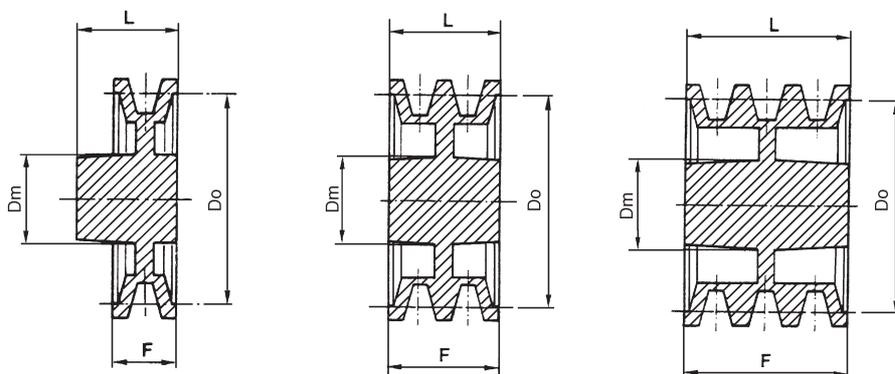

* = Utförande med liv / Plate pulley

• = Utförande med ekrar / Arm pulley

| Do | Ant. spår Grooves | Best. Nr. Code | Typ Type | Dm | F | L | Vikt / kg weight / kgs |
|-----|----------------------|-------------------|-------------|----|----|----|---------------------------|
| 40 | 1 | ZSPZA401FB | * | 31 | 16 | 28 | 0.08 |
| | 2 | ZSPZA402FB | * | - | 28 | 28 | 0.09 |
| | 3 | ZSPZA403FB | * | - | 42 | 42 | 0.09 |
| 50 | 1 | ZSPZA501FB | * | 33 | 16 | 28 | 0.12 |
| | 2 | ZSPZA502FB | * | - | 28 | 28 | 0.14 |
| | 3 | ZSPZA503FB | * | - | 42 | 42 | 0.20 |
| 60 | 1 | ZSPZA601FB | * | 35 | 16 | 28 | 0.16 |
| | 2 | ZSPZA602FB | * | - | 28 | 28 | 0.20 |
| | 3 | ZSPZA603FB | * | - | 42 | 42 | 0.16 |
| 65 | 1 | ZSPZA651FB | * | 36 | 16 | 28 | 0.18 |
| | 2 | ZSPZA652FB | * | 36 | 28 | 28 | 0.24 |
| | 3 | ZSPZA653FB | * | 36 | 42 | 42 | 0.34 |
| 70 | 1 | ZSPZA701FB | * | 36 | 16 | 28 | 0.17 |
| | 2 | ZSPZA702FB | * | 36 | 28 | 28 | 0.26 |
| | 3 | ZSPZA703FB | * | 36 | 42 | 42 | 0.38 |
| 75 | 1 | ZSPZA751FB | * | 39 | 16 | 28 | 0.19 |
| | 2 | ZSPZA752FB | * | 40 | 28 | 28 | 0.30 |
| | 3 | ZSPZA753FB | * | 40 | 42 | 42 | 0.44 |
| 80 | 1 | ZSPZA801FB | * | 39 | 16 | 28 | 0.22 |
| | 2 | ZSPZA802FB | * | 40 | 28 | 28 | 0.32 |
| | 3 | ZSPZA803FB | * | 40 | 42 | 42 | 0.50 |
| 85 | 1 | ZSPZA851FB | * | 40 | 16 | 28 | 0.24 |
| | 2 | ZSPZA852FB | * | 40 | 28 | 28 | 0.39 |
| | 3 | ZSPZA853FB | * | 40 | 42 | 42 | 0.52 |
| 90 | 1 | ZSPZA901FB | * | 40 | 16 | 28 | 0.25 |
| | 2 | ZSPZA902FB | * | 40 | 28 | 28 | 0.37 |
| | 3 | ZSPZA903FB | * | 40 | 42 | 42 | 0.55 |
| 95 | 1 | ZSPZA951FB | * | 43 | 16 | 28 | 0.31 |
| | 2 | ZSPZA952FB | * | 43 | 28 | 28 | 0.42 |
| | 3 | ZSPZA953FB | * | 43 | 42 | 42 | 0.55 |
| 100 | 1 | ZSPZA1001FB | * | 43 | 16 | 28 | 0.27 |
| | 2 | ZSPZA1002FB | * | 43 | 28 | 28 | 0.39 |
| | 3 | ZSPZA1003FB | * | 43 | 42 | 42 | 0.56 |
| 105 | 1 | ZSPZA1051FB | * | 45 | 16 | 28 | 0.31 |
| | 2 | ZSPZA1052FB | * | 45 | 28 | 28 | 0.41 |
| | 3 | ZSPZA1053FB | * | 45 | 42 | 42 | 0.61 |
| 110 | 1 | ZSPZA1101FB | * | 45 | 16 | 28 | 0.32 |
| | 2 | ZSPZA1102FB | * | 45 | 28 | 28 | 0.43 |
| | 3 | ZSPZA1103FB | * | 45 | 42 | 42 | 0.67 |
| 112 | 1 | ZSPZA1121FB | * | 45 | 16 | 28 | 0.32 |
| | 2 | ZSPZA1122FB | * | 45 | 28 | 28 | 0.43 |
| | 3 | ZSPZA1123FB | * | 45 | 42 | 42 | 0.68 |
| 115 | 1 | ZSPZA1151FB | * | 46 | 16 | 28 | 0.32 |
| | 2 | ZSPZA1152FB | * | 46 | 28 | 28 | 0.45 |
| | 3 | ZSPZA1153FB | * | 46 | 42 | 42 | 0.70 |
| 120 | 1 | ZSPZA1201FB | * | 46 | 16 | 28 | 0.35 |
| | 2 | ZSPZA1202FB | * | 46 | 28 | 28 | 0.46 |
| | 3 | ZSPZA1203FB | * | 46 | 42 | 42 | 0.72 |
| 125 | 1 | ZSPZA1251FB | * | 47 | 16 | 28 | 0.37 |
| | 2 | ZSPZA1252FB | * | 47 | 28 | 28 | 0.51 |
| | 3 | ZSPZA1253FB | * | 47 | 42 | 42 | 0.75 |
| 130 | 1 | ZSPZA1301FB | * | 47 | 16 | 28 | 0.39 |
| | 2 | ZSPZA1302FB | * | 47 | 28 | 28 | 0.53 |
| | 3 | ZSPZA1303FB | * | 47 | 42 | 42 | 0.82 |
| 135 | 1 | ZSPZA1351FB | * | 48 | 16 | 28 | 0.42 |
| | 2 | ZSPZA1352FB | * | 48 | 28 | 28 | 0.58 |
| | 3 | ZSPZA1353FB | * | 48 | 42 | 42 | 0.85 |
| 140 | 1 | ZSPZA1401FB | * | 48 | 16 | 28 | 0.43 |
| | 2 | ZSPZA1402FB | * | 48 | 28 | 28 | 0.57 |
| | 3 | ZSPZA1403FB | * | 48 | 42 | 42 | 0.87 |

| Do | Ant. spår Grooves | Best. Nr. Code | Typ Type | Dm | F | L | Vikt / kg weight / kgs |
|-----|----------------------|-------------------|-------------|----|----|----|---------------------------|
| 150 | 1 | ZSPZA1501FB | * | 50 | 16 | 28 | 0.48 |
| | 2 | ZSPZA1502FB | * | 50 | 28 | 28 | 0.61 |
| | 3 | ZSPZA1503FB | * | 50 | 42 | 42 | 0.93 |
| 160 | 1 | ZSPZA1601FB | * | 52 | 16 | 28 | 0.52 |
| | 2 | ZSPZA1602FB | * | 52 | 28 | 28 | 0.64 |
| | 3 | ZSPZA1603FB | * | 52 | 42 | 42 | 0.89 |
| 165 | 1 | ZSPZA1651FB | * | 54 | 16 | 28 | 0.56 |
| | 2 | ZSPZA1652FB | * | 54 | 28 | 28 | 0.62 |
| | 3 | ZSPZA1653FB | * | 54 | 42 | 42 | 0.98 |
| 170 | 1 | ZSPZA1701FB | * | 54 | 16 | 28 | 0.57 |
| | 2 | ZSPZA1702FB | * | 54 | 28 | 28 | 0.75 |
| | 3 | ZSPZA1703FB | * | 54 | 42 | 42 | 1.07 |
| 180 | 1 | ZSPZA1801FB | * | 56 | 16 | 28 | 0.60 |
| | 2 | ZSPZA1802FB | * | 56 | 28 | 28 | 0.82 |
| | 3 | ZSPZA1803FB | * | 56 | 42 | 42 | 1.02 |
| 190 | 1 | ZSPZA1901FB | * | 58 | 16 | 28 | 0.71 |
| | 2 | ZSPZA1902FB | * | 58 | 28 | 28 | 0.89 |
| | 3 | ZSPZA1903FB | * | 58 | 42 | 42 | 1.27 |
| 200 | 1 | ZSPZA2001FB | * | 60 | 16 | 28 | 0.75 |
| | 2 | ZSPZA2002FB | * | 60 | 28 | 28 | 0.99 |
| | 3 | ZSPZA2003FB | * | 60 | 42 | 42 | 1.37 |
| 210 | 1 | ZSPZA2101FB | * | 60 | 16 | 28 | 0.82 |
| | 2 | ZSPZA2102FB | * | 60 | 28 | 28 | 0.95 |
| | 3 | ZSPZA2103FB | * | 60 | 42 | 42 | 1.47 |
| 220 | 1 | ZSPZA2201FB | * | 60 | 16 | 28 | 0.84 |
| | 2 | ZSPZA2202FB | * | 60 | 28 | 28 | 1.11 |
| | 3 | ZSPZA2203FB | * | 60 | 42 | 42 | 1.45 |
| 225 | 1 | ZSPZA2251FB | * | 60 | 16 | 28 | 0.86 |
| | 2 | ZSPZA2252FB | * | 60 | 28 | 28 | 1.13 |
| | 3 | ZSPZA2253FB | * | 60 | 42 | 42 | 1.47 |
| 230 | 1 | ZSPZA2301FB | * | 60 | 16 | 28 | 0.87 |
| | 2 | ZSPZA2302FB | * | 60 | 28 | 28 | 1.15 |
| | 3 | ZSPZA2303FB | * | 60 | 42 | 42 | 1.50 |
| 240 | 1 | ZSPZA2401FB | * | 60 | 16 | 28 | 1.04 |
| | 2 | ZSPZA2402FB | * | 60 | 28 | 28 | 1.27 |
| | 3 | ZSPZA2403FB | * | 60 | 42 | 42 | 1.53 |
| 250 | 1 | ZSPZA2501FB | * | 60 | 16 | 28 | 1.17 |
| | 2 | ZSPZA2502FB | * | 60 | 28 | 28 | 1.34 |
| | 3 | ZSPZA2503FB | * | 60 | 42 | 42 | 1.56 |
| 280 | 1 | ZSPZA2801FB | • | 60 | 16 | 28 | 1.06 |
| | 2 | ZSPZA2802FB | • | 60 | 28 | 28 | 1.34 |
| | 3 | ZSPZA2803FB | • | 60 | 42 | 42 | 1.65 |
| 300 | 1 | ZSPZA3001FB | • | 62 | 16 | 28 | 1.17 |
| | 2 | ZSPZA3002FB | • | 62 | 28 | 28 | 1.64 |
| | 3 | ZSPZA3003FB | • | 62 | 42 | 42 | 1.80 |
| 320 | 1 | ZSPZA3201FB | • | 62 | 16 | 28 | 1.17 |
| | 2 | ZSPZA3202FB | • | 62 | 28 | 28 | 1.64 |
| | 3 | ZSPZA3203FB | • | 62 | 42 | 42 | 1.80 |
| 350 | 1 | ZSPZA3501FB | • | 62 | 16 | 28 | 1.14 |
| | 2 | ZSPZA3502FB | • | 62 | 28 | 28 | 2.10 |
| | 3 | ZSPZA3503FB | • | 62 | 42 | 42 | 2.57 |
| 400 | 1 | ZSPZA4001FB | • | 62 | 16 | 28 | 1.16 |
| | 2 | ZSPZA4002FB | • | 62 | 28 | 28 | 2.50 |
| | 3 | ZSPZA4003FB | • | 62 | 42 | 42 | 3.00 |
| 450 | 1 | ZSPZA4501FB | • | 62 | 16 | 28 | 1.21 |
| | 2 | ZSPZA4502FB | • | 62 | 28 | 28 | 2.60 |
| | 3 | ZSPZA4503FB | • | 62 | 42 | 42 | 3.10 |
| 500 | 1 | ZSPZA5001FB | • | 62 | 16 | 28 | 1.40 |
| | 2 | ZSPZA5002FB | • | 62 | 28 | 28 | 2.70 |
| | 3 | ZSPZA5003FB | • | 62 | 42 | 42 | 3.30 |