

CYLINDRISKA KUGGHJUL I PLAST

PLASTIC SPURGEARS

Modul 0.7 rakskurna kuggar

Module 0.7 straight toothed

Ingreppsvinkel 20°


Pressure angle 20°

Material: Acetal Natur

Material: Acetal Natur

Toleranser: -

Tolerance: -

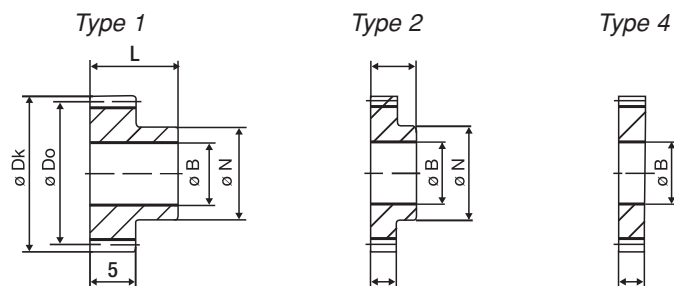

Antal tänder No of teeth						Best. Nr. Code	Md	Best. Nr. Code	Md	Best. Nr. Code	Md
Z	B	N	L	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)
12	3	6	11	9.8	8.4	D-0712-05	-	-	-	-	-
13	3	7	11	10.5	9.1	D-0713-05	-	-	-	-	-
14	3	8	11	11.2	9.8	D-0714-05	-	-	-	-	-
15	3	8	11	11.9	10.5	D-0715-05	-	-	-	-	-
16	4	9	11	12.6	11.2	D-0716-05	-	-	-	-	-
17	4	10	11	13.3	11.9	D-0717-05	-	-	-	-	-
18	4	10	11	14.0	12.6	D-0718-05	-	-	-	-	-
19	4	10	11	14.7	13.3	D-0719-05	-	-	-	-	-
20	4	10	11	15.4	14.0	D-0720-05	-	-	-	-	-
21	4	12	11	16.1	14.7	D-0721-05	-	-	-	-	-
22	4	12	11	16.8	15.4	D-0722-05	-	-	-	-	-
23	4	12	11	17.5	16.1	D-0723-05	-	-	-	-	-
24	4	12	11	18.2	16.8	D-0724-05	-	-	-	-	-
25	4	15	11	18.9	17.5	D-0725-05	-	-	-	-	-
26	4	15	11	19.6	18.2	D-0726-05	-	-	-	-	-
27	4	15	11	20.3	18.9	D-0727-05	-	-	-	-	-
28	4	15	11	21.0	19.6	D-0728-05	-	-	-	-	-
30	4	15	11	22.4	21.0	D-0730-05	-	-	-	-	-
32	4	18	11	23.8	22.4	D-0732-05	-	-	-	-	-
35	4	18	11	25.9	24.5	D-0735-05	-	-	-	-	-
36	4	18	11	26.6	25.2	D-0736-05	-	-	-	-	-
38	4	18	11	28.0	26.6	D-0738-05	-	-	-	-	-
40	4	18	11	29.4	28.0	D-0740-05	-	-	-	-	-
42	5	20	11	30.8	29.4	D-0742-05	-	-	-	-	-
45	5	20	11	32.9	31.5	D-0745-05	-	-	-	-	-
48	5	20	11	35.0	33.6	D-0748-05	-	-	-	-	-
50	5	20	11	36.4	35.0	D-0750-05	-	-	-	-	-
52	5	20	11	37.8	36.4	D-0752-05	-	-	-	-	-
54	5	20	11	39.2	37.8	D-0754-05	-	-	-	-	-
55	5	20	11	39.9	38.5	D-0755-05	-	-	-	-	-
56	5	20	11	40.6	39.2	D-0756-05	-	-	-	-	-
60	5	20	13	43.4	42.0	D-0760-05	-	-	-	-	-
64	5	20	13	46.2	44.8	D-0765-05	-	-	-	-	-
65	5	20	13	46.9	45.5	D-0765-05	-	-	-	-	-
70	5	20	13	50.4	49.0	D-0770-05	-	-	-	-	-
72	6	20	13	51.8	50.4	D-0772-05	-	-	-	-	-
75	6	20	13	53.9	52.5	D-0775-05	-	-	-	-	-
80	6	20	13	57.4	56.0	D-0780-05	-	-	-	-	-
85	6	20	13	60.9	59.5	D-0785-05	-	-	-	-	-
90	6	20	13	64.4	63.0	D-0790-05	-	-	-	-	-
96	8	25	13	68.6	67.2	D-0796-05	-	-	-	-	-
100	8	25	13	71.4	70.0	D-07100-05	-	-	-	-	-
120	8	25	13	85.4	84.0	D-07120-05	-	-	-	-	-