

CYLINDRISKA KUGGHJUL I MÄSSING


BRASS SPURGEARS

Modul 0.7 rakskurna kuggar
Module 0.7 straight toothed

Ingreppsvinkel 20°
 Pressure angle 20°

Material: Mässing MS 58
 Material: Brass MS 58

Toleranser: B = H7
 Tolerance: B = H7

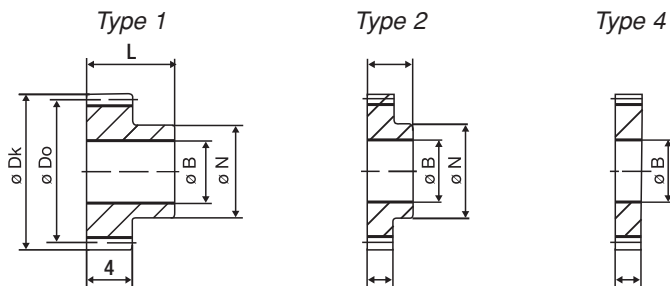

Antal tänder No of teeth						Best. Nr. Code	Md	Best. Nr. Code	Md	Best. Nr. Code	Md
Z	B	N	L	Dk	Do	Type 1	(Nm)	Type 2	(Nm)	Type 4	(Nm)
10	3	5	10	8.4	7.0	M-0710-04	-	-	-	-	-
12	3	6	10	9.8	8.4	M-0712-04	-	-	-	-	-
13	3	7	10	10.5	9.1	M-0713-04	-	-	-	-	-
14	3	8	10	11.2	9.8	M-0714-04	-	-	-	-	-
15	3	8	10	11.9	10.5	M-0715-04	-	-	-	-	-
16	3	9	10	12.6	11.2	M-0716-04	-	-	-	-	-
17	3	10	10	13.3	11.9	M-0717-04	-	-	-	-	-
18	3	10	10	14.0	12.6	M-0718-04	-	-	-	-	-
19	3	10	10	14.7	13.3	M-0719-04	-	-	-	-	-
20	4	10	10	15.4	14.0	M-0720-04	-	-	-	-	-
21	4	12	10	16.1	14.7	M-0721-04	-	-	-	-	-
22	4	12	10	16.8	15.4	M-0722-04	-	-	-	-	-
23	4	12	10	17.5	16.1	M-0723-04	-	-	-	-	-
24	4	12	10	18.2	16.8	M-0724-04	-	-	-	-	-
25	4	12	10	18.9	17.5	M-0725-04	-	-	-	-	-
26	4	12	10	19.6	18.2	M-0726-04	-	-	-	-	-
27	4	12	10	20.3	18.9	M-0727-04	-	-	-	-	-
28	4	12	10	21.0	19.6	M-0728-04	-	-	-	-	-
30	4	12	10	22.4	21.0	M-0730-04	-	-	-	-	-
32	4	12	10	23.8	22.4	M-0732-04	-	-	-	-	-
35	4	12	10	25.9	24.5	M-0735-04	-	-	-	-	-
36	4	12	10	26.6	25.2	M-0736-04	-	-	-	-	-
38	4	12	10	28.0	26.6	M-0738-04	-	-	-	-	-
40	5	12	10	29.4	28.0	M-0740-04	-	-	-	-	-
42	5	12	10	30.8	29.4	M-0742-04	-	-	-	-	-
45	5	12	10	32.9	31.5	M-0745-04	-	-	-	-	-
48	5	15	10	35.0	33.6	M-0748-04	-	-	-	-	-
50	5	15	10	36.4	35.0	M-0750-04	-	-	-	-	-
52	5	15	10	37.8	36.4	M-0752-04	-	-	-	-	-
54	5	15	10	39.2	37.8	M-0754-04	-	-	-	-	-
55	5	15	10	39.5	38.5	M-0755-04	-	-	-	-	-
56	5	15	10	40.6	39.2	M-0756-04	-	-	-	-	-
60	5	15	12	43.4	42.0	M-0760-04	-	-	-	-	-
64	5	15	12	46.2	44.8	M-0764-04	-	-	-	-	-
65	5	15	12	46.9	45.5	M-0765-04	-	-	-	-	-
70	5	18	12	50.4	49.0	M-0770-04	-	-	-	-	-
72	5	18	12	51.8	50.4	M-0772-04	-	-	-	-	-
75	5	18	12	53.9	52.5	M-0775-04	-	-	-	-	-
80	5	18	12	57.4	56.0	M-0780-04	-	-	-	-	-
85	6	20	12	60.9	59.5	M-0785-04	-	-	-	-	-
90	6	20	12	64.4	63.0	M-0790-04	-	-	-	-	-
96	6	25	12	68.6	67.2	M-0796-04	-	-	-	-	-
100	6	25	12	71.4	70.0	M-07100-04	-	-	-	-	-
120	6	25	12	85.4	84.0	M-07120-04	-	-	-	-	-