

TRANSPORTÖRKEDJEHJUL

SPROCKETS FOR CONVEYOR CHAIN

Kedjehjul för Standard kedja med massiv bult


Sprockets for standard chain with solid pin

DIN 8167 - ISO 1977 Standard

Transportörkedja

Conveyor Chain

M 112 - ME 112 - MR 112

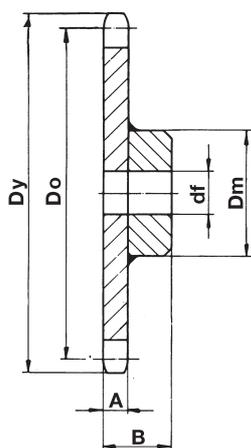


Delning Pitch P mm	Tandantal No. of teeth Z	Do mm	Ytterdiam. Dy / Outher dia. Dy			A		B mm	Dm mm	df mm
			Rulle / Roller Typ / Type A* mm	Rulle / Roller Typ / Type B* mm	Rulle / Roller Typ / Type C-D* mm	Rulle / Roller Typ / Type A-B-C mm	Rulle / Roller Typ / Type D mm			
80	8	209.05	220	225	240	29	21	Dessa mått på förfrågan	These measurs on request	
"	10	258.88	270	274	289	"	"			
"	12	309.09	320	325	340	"	"			
"	16	410.06	421	426	441	"	"			
100	8	261.31	272	277	292	"	"			
"	10	323.06	334	339	354	"	"			
"	12	386.37	397	402	417	"	"			
"	16	512.58	524	528	544	"	"			
125	8	326.64	338	342	357	"	"			
"	10	404.51	416	420	435	"	"			
"	12	482.96	494	498	513	"	"			
"	16	640.73	652	656	671	"	"			
160	8	418.10	429	434	449	"	"			
"	10	517.77	529	533	548	"	"			
"	12	618.19	629	634	649	"	"			
"	16	820.13	831	836	851	"	"			
200	8	522.62	534	538	553	"	"			
"	10	647.21	658	663	678	"	"			
"	12	772.74	784	788	803	"	"			
"	16	1025.16	1036	1041	1056	"	"			

Transportörkedja

Conveyor Chain

M 160 - ME 160 - MR 160

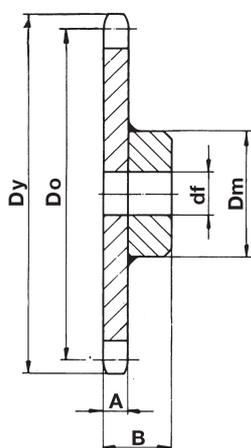

Delning Pitch P mm	Tandantal No. of teeth Z	Do mm	Ytterdiam. Dy / Outher dia. Dy			A		B mm	Dm mm	df mm
			Rulle / Roller Typ / Type A* mm	Rulle / Roller Typ / Type B* mm	Rulle / Roller Typ / Type C-D* mm	Rulle / Roller Typ / Type A-B-C mm	Rulle / Roller Typ / Type D mm			
100	8	261.31	274	280	297	34	25	Dessa mått på förfrågan	These measurs on request	
"	10	323.06	336	342	359	"	"			
"	12	386.37	399	405	422	"	"			
"	16	512.58	526	531	548	"	"			
125	8	326.64	340	345	362	"	"			
"	10	404.51	418	423	440	"	"			
"	12	482.96	496	501	518	"	"			
"	16	640.73	654	659	676	"	"			
160	8	418.10	431	437	454	"	"			
"	10	517.77	531	536	553	"	"			
"	12	618.19	631	637	654	"	"			
"	16	820.13	833	839	856	"	"			
200	8	522.62	536	541	558	"	"			
"	10	647.21	660	666	683	"	"			
"	12	772.74	786	791	808	"	"			
"	16	1025.16	1038	1044	1061	"	"			
250	8	653.28	666	672	689	"	"			
"	10	809.02	822	828	845	"	"			
"	12	965.92	979	984	1001	"	"			
"	16	1281.46	1294	1300	1317	"	"			

* Min. ytterdiameter

* Min. outherdiameter