

# KONISKA RAKSKURNA KUGGHJUL I PLAST

## PLASTIC BEVEL GEARS, STRAIGHT CUT

### Modul 1.0 - 1.5


#### Module 1.0 - 1.5

Maskinbearbetad kugg

Machine-finished teeth

Material: Delrin

Material: Delrin

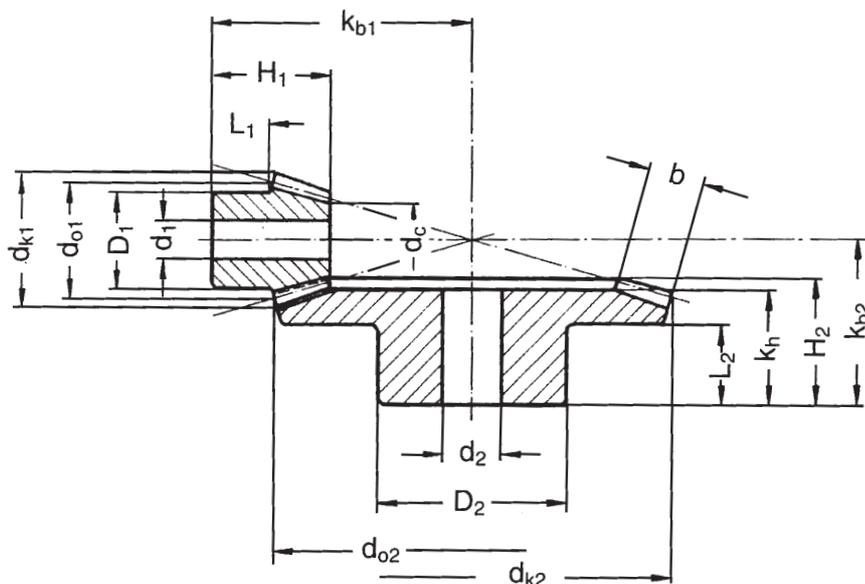

### Modul 1

Best nr Code	i	Z1	Z2	do1	b	dk1	dk2	D1	D2	L1	L2	d1	d2	Kb1	Kb2	H1	H2	Kh
N-100-16-16	1.0	16	-	16.0	4.0	17.4	-	13.3	-	6.5	-	4	-	16	-	11.2	-	-
N-100-19-19	1.0	19	-	19.0	4.0	20.4	-	15.3	-	6.5	-	4	-	18	-	11.8	-	-
N-100-22-22	1.0	22	-	22.0	4.7	23.4	-	15.3	-	5.5	-	5	-	20	-	12.8	-	-
N-100-26-26	1.0	26	-	26.0	5.5	27.4	-	20.3	-	8.0	-	5	-	22	-	13.3	-	-
N-100-30-30	1.0	30	-	30.0	6.4	31.4	-	20.3	-	8.0	-	5	-	26	-	16.0	-	-
N-100-16-24	1.5	16	24	16.0	4.3	18.1	24.8	13.3	20.3	7.0	9.3	4	5	20	20	12.0	14.8	13.0
N-100-15-30	2.0	15	30	15.0	5.0	17.4	30.6	13.3	20.3	6.5	9.0	4	5	22	20	11.9	15.1	14.0
N-100-16-40	2.5	16	40	16.0	6.5	18.5	40.4	13.3	25.3	7.4	9.0	4	8	28	20	14.4	14.8	14.0
N-100-15-45	3.0	15	45	15.0	7.1	17.7	45.3	13.3	25.3	9.2	10.0	4	8	32	22	16.6	17.1	15.0
N-100-16-56	3.5	16	56	16.0	8.7	18.7	56.3	13.3	30.3	7.6	10.0	4	8	36	22	16.6	16.7	15.0
N-100-15-60	4.0	15	60	15.0	9.3	17.8	60.3	13.3	30.3	7.7	10.0	4	8	38	22	17.2	17.1	15.0
N-100-15-75	5.0	15	75	15.0	11.5	17.8	75.2	13.3	40.3	8.3	10.0	4	8	46	22	20.0	17.1	15.0

### Modul 1.5

Best nr Code	i	Z1	Z2	do1	b	dk1	dk2	D1	D2	L1	L2	d1	d2	Kb1	Kb2	H1	H2	Kh
N-150-16-16	1.0	16	-	24.0	6.0	26.1	-	20.3	-	12.0	-	8	-	26	-	18.9	-	-
N-150-19-19	1.0	19	-	28.5	7.0	30.6	-	20.3	-	12.0	-	8	-	30	-	21.3	-	-
N-150-22-22	1.0	22	-	33.0	7.5	35.1	-	25.3	-	12.0	-	8	-	33	-	22.5	-	-
N-150-26-26	1.0	26	-	39.0	8.5	41.1	-	28.3	-	12.0	-	8	-	36	-	23.2	-	-
N-150-30-30	1.0	30	-	45.0	10.0	47.1	-	30.3	-	12.0	-	12	-	42	-	27.2	-	-
N-150-16-24	1.5	16	24	24.0	8.0	27.1	37.2	20.3	28.3	11.8	16.0	8	8	31	32	20.3	24.9	23.0
N-150-15-30	2.0	15	30	22.5	9.0	26.1	45.9	20.3	32.3	11.9	16.0	8	8	35	32	21.1	25.2	23.0
N-150-16-40	2.5	16	40	24.0	11.5	27.9	60.7	20.3	40.3	12.3	18.0	8	14	43	35	24.2	27.8	25.5
N-150-15-45	3.0	15	45	22.5	10.5	26.5	68.1	19.3	45.3	11.7	20.0	8	14	46	37	22.6	29.6	27.0
N-150-16-56	3.5	16	56	24.0	12.0	28.1	84.5	20.3	45.3	11.5	25.0	8	14	54	43	24.0	34.8	32.0
N-150-15-60	4.0	15	60	22.5	11.0	26.7	90.4	20.3	50.3	11.7	25.0	8	16	57	42	23.0	34.0	31.0
N-150-15-75	5.0	15	75	22.5	12.0	26.7	112.8	20.3	50.3	15.0	20.0	8	16	72	42	27.8	33.7	30.0